

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:
Walter Aldaz, et al.

Serial No.: 10/778,003

Filed: February 12, 2004

Confirmation No.: Unknown

For: SEAL

§
§
§
§
§
§
§
§
§
§
§

Group Art Unit: Unknown

Examiner: Unknown

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

CERTIFICATE OF MAILING 37 CFR 1.8	
I hereby certify that this correspondence is being deposited on May <u>9</u> , 2004 with the United States Postal Service as First Class Mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450 Alexandria, VA 22313-1450.	
Date <u>4 May 2004</u>	Signature <u>William B. Patterson</u>

CLAIM TO PRIORITY

Applicant(s) reaffirm the claim for the benefit of filing date of the following foreign patent application referred to in Applicant's Declaration:

British Application Serial Number GB 0303152.3 filed February 12, 2003.

A copy of the application certified by the British Patent Office is enclosed.

Respectfully submitted,

William B. Patterson
Registration No. 34,102
MOSER, PATTERSON & SHERIDAN, L.L.P.
3040 Post Oak Blvd. Suite 1500
Houston, TX 77056
Telephone: (713) 623-4844
Facsimile: (713) 623-4846
Agent for Applicant(s)

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

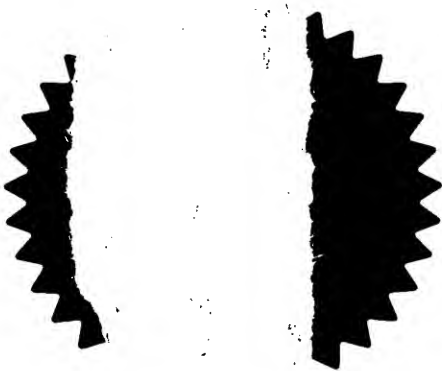

Signed


Dated 15 April 2004

THIS PAGE BLANK (USPTO)



13 FEB 03 07:43:55-5 000239
POL/7700 0.00-0303152.3

1/77

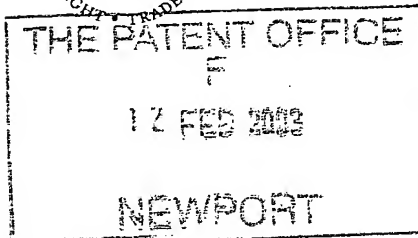

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

AS/RO/HSo/P12196GB

2. Patent application number

(The Patent Office will fill in this part)

0303152.3

12 FEB 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

819581006

Patents ADP number (*if you know it*)

WEATHERFORD/LAMB, INC
515 POST OAK BOULEVARD
SUITE 600
HOUSTON
TEXAS 77027
U.S.A.

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE, U.S.A.

4. Title of the invention

SEAL

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

CRUIKSHANK & FAIRWEATHER
19 ROYAL EXCHANGE SQUARE
GLASGOW
G1 3AE

Patents ADP number (*if you know it*)

547002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

34

Claim(s)

13

Abstract

-

Drawing(s)

9

10. If you are also filing any of the following, state how many against each item.

Priority documents

-

Translations of priority documents

-

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

-

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

-

Any other documents (please specify)

-

11.

I/We request the grant of a patent on the basis of this application.

Signature

W. B. Shank

Date

CRUIKSHANK & FAIRWEATHER 11 FEBRUARY 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

ANDREW SHANKS

0141 221 5767

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

SEAL

BACKGROUND OF THE INVENTION

The present invention relates to a seal. In particular, but not exclusively, the present invention relates to a seal for sealing at least part of a wall of a well borehole.

FIELD OF THE INVENTION

In the oil and gas exploration and production industry, boreholes are drilled through rock formations to gain access to hydrocarbon-bearing formations, to allow the hydrocarbons to be recovered to surface. During drilling of a typical borehole, which may be several thousand feet in length, many different rock formations are encountered.

Geological surveys are carried out both before drilling and at various stages during the drilling procedure to determine physical characteristics of the rock formations. Often, rock formations having problematic physical characteristics, such as high permeability, may be encountered. This can cause various

~~problems such as allowing unwanted water or gases to~~
enter the borehole; crossflow between high and low pressure zones; fluid communication between a highly permeable formation and adjacent formations; and where a sub-normal or over-pressured formation is sealed off, the

permeability of the formation may be such that high pressure fluids permeate upwardly, re-entering the borehole at a different location.

5 Rock formations can also become damaged during drilling of a borehole, for example, due to the forces exerted on the rock by a drilling bit and the pressurised drilling fluid used in the drilling operation. In these situations, drilling fluid can be lost into the formation, which is detected at surface by a drop in pit
10 volume of the drill fluid. Pit volume is the known volume of drill fluid in surface tanks. As a borehole is extended, this volume goes down by a known amount. Losses above and beyond this reduction due to loss of drilling fluid can therefore be detected. In certain
15 situations, drilling may be halted, the drill string pulled and remedial action taken to stabilise the rock formation, for example, to prevent further loss of drilling fluid. This is because, in this case, it is preferred not to conduct further drilling whilst drilling
20 fluid is being lost into the formation. Furthermore,

drilling fluids are typically very expensive and are re-circulated and cleaned for use in subsequent drilling procedures, therefore loss of high quantities of drilling fluid is unacceptable.

Conventionally, these problems have been overcome by running in a length of casing, suspended from the wellhead and cementing the casing in place, to effectively seal off and isolate the damaged formation.

5 However, running and cementing an additional casing string is a time-consuming and expensive solution to the problem.

Furthermore, a drilling procedure is carefully planned and, typically, a borehole is drilled to a
10 specified depth, logging procedures are carried out to determine further characteristics of the rock formation and the drilled borehole is then cased and cemented. The borehole is then extended by drilling a smaller diameter hole from the bottom of the cased section to a second
15 depth and the borehole is again logged and cased with a slightly smaller diameter casing. Thus, each time the drilling procedure is halted and a casing run-in, the internal diameter of the borehole is reduced.

Accordingly, if a problematic formation is
20 unexpectedly encountered and it becomes necessary to

~~carry out a remedial operation by inserting smaller~~
diameter casing earlier than planned, this may restrict the final internal diameter of the borehole. Although this may be allowed for during planning, it is generally
25 undesired and several such occurrences may cause a

reduction in final bore diameter, with a critical effect on the future production of hydrocarbons from the well.

Furthermore, even where a solid tubing has been located to seal off a problematic formation, problems may remain. For example, a reduction in casing shoe integrity can cause fluid ingress or egress. A casing shoe is the last section of a string of casing and, during completion of a well, a liner is typically located extending from the shoe of a larger diameter casing. The formation adjacent the casing shoe/liner interface may be a weak point and vulnerable to damage and potential fracture. This can cause a loss in pressure integrity, leading to fluid ingress or egress.

Also, gas migration may occur behind a pipe such as a borehole liner, even where a liquid pressure seal is provided during cementing between the pipe and the borehole wall. Such gas migration may cause gas to enter the bore at an undesired location.

In recent years, a great deal of research has been conducted in the industry into expandable tubing technologies. In particular, expandable sand exclusion tubing, such as that disclosed in International patent publication no WO97/17524 (Shell), and as sold under the ESS trademark by the present applicant, has been developed for solving problems involving sand production.

The ESS tubing prevents sand from entering a lined bore, avoiding the requirement to separate sand from produced fluids, and the tendency of sand to block the bore and cause accelerated wear of downhole components. Often ESS tubing is run on solid tubing, located in a production zone of a borehole, and diametrically expanded to provide a simple method of recovering well fluids whilst separating any sand from the produced fluids. However, it can be more difficult to achieve effective zone isolation when setting the ESS tubing string in a borehole in the above described situations. In particular, known downhole packers are not expandable and may not inflate sufficiently to seal against a borehole wall in the open hole environment.

It is amongst the objects of embodiments of the present invention to obviate or mitigate at least one of the foregoing disadvantages.

SUMMARY OF THE INVENTION

According to a first aspect of the present invention, there is provided an expandable seal for sealing at least part of a wall of a well borehole, the expandable seal comprising:

- an expandable tubular support member; and
- an inflatable seal element mounted externally of the expandable tubular support member for inflation radially

outwardly into sealing engagement with at least part of the wall of the well borehole.

According to a second aspect of the present invention, there is provided an expandable seal assembly for sealing at least part of a wall of a well borehole, the assembly comprising:

first and second spaced expandable seals for sealing engagement with the wall of the well borehole at spaced locations, each expandable seal comprising an expandable tubular support member and an inflatable seal element mounted externally of the expandable tubular support member for inflation radially outwardly into sealing engagement with the well borehole wall.

The assembly may further comprise an expandable tubular extending between the first and second spaced expandable seals.

The invention provides an expandable seal which may be used for sealing an open hole, that is, one which has not yet been lined with casing, liner or other tubing. Open holes have irregular bore walls which cannot be sufficiently sealed using existing, known sealing techniques. The seal has particular uses in formations having a tendency to "wash out" (deteriorate under pressure of circulated drilling fluid); boreholes that have irregular hole sizes; and formations that are soft,

unconsolidated or have high vertical permeability. This is because inflation of the seal element into contact with a borehole wall provides a greatly enhanced seal load on the formation. Furthermore, as the seal includes an expandable tubular support member, it is possible to set the seal in a borehole whilst minimising or avoiding reduction in the internal diameter of the borehole. Also, the expandable seal assembly may be used to seal off and isolate part of a well borehole from the remainder of the borehole. Thus, for example, where a particular zone of the borehole, such as a particular rock formation, has become damaged or is highly permeable, this zone may be isolated from the remainder of the borehole.

Preferably, the expandable seal is adapted for sealing at least part of an unlined well borehole. Alternatively, the expandable seal may be for sealing a tubing lined borehole, which may be lined with casing, liner or other tubing.

The seal may further comprise at least one chamber, and may comprise a plurality of chambers adapted for inflation to urge the seal element radially outwardly, and the chamber may be located radially inwardly of the seal element. Thus, when the chamber is inflated the seal element is inflated and urged radially outwardly.

The chamber may be annular and may be at least partially defined by the seal element and the support member.

Preferably, the seal element is expandable such that expansion of the support member also expands the seal element. This may bring the seal element into contact with the borehole wall to provide at least a partial seal.

Preferably, the seal further comprises a filler material adapted for maintaining the seal element inflated and in sealing engagement with the borehole. The seal chamber may contain the filler material. The filler material may be adapted to react with a selected reactant to swell, solidify or otherwise maintain the seal inflated. The filler material may comprise a solid material and is preferably a granular solid material. The seal may be inflatable by supplying a fluid to the seal, and the fluid may comprise a reactant for reacting with the filler material to form a single, solid member, or a viscous mass. The filler material may comprise a mixture of bentonite (absorbent aluminium silicate clay) and a water soluble polymer such as polyacrylamide, as disclosed in US patent no. 3,909,421, the disclosure of which is incorporated herein by way of reference. When mixed with water as a reactant fluid, a clay is formed and the water soluble polymer flocculates and congeals

the clay to form a much stronger and stiffer cement-like plug. Various other filler materials, such as those disclosed in US patent nos. 4,633,950; 4,503,170; 4,475,594; 4,445,576; 4,442,241 and 4,391,925, the disclosures of which are incorporated hereby by way of reference, may alternatively be employed. The reactant may comprise water, an aqueous solution, a drilling fluid such as drilling mud, production fluid, or any other suitable fluid or fluid mixture. In alternatives, any other suitable material or method may be employed for maintaining the seal element inflated, such as a cement or other hardenable material or a gelatinous material.

Preferably, the seal element is elastically deformable. This ensures that the seal element is relatively easily expanded and also provides for good sealing engagement with the borehole. The seal element preferably comprises an elastomeric material. Such materials have good sealing capabilities. Most preferably, the seal element comprises a natural rubber or a "swelling" elastomer which swells in contact with water or hydrocarbons by absorption. Thus, in the

downhole environment where water and hydrocarbons are present, this provides improved seal function of the seal element over time as water/hydrocarbons are absorbed.

Alternatively, any other suitable material such as a plastics material may be employed.

The support member may include at least one aperture for fluid communication between the seal element and the interior of the support member. Thus, fluid can flow from the support member, through the apertures and to the seal element to allow reaction of the filler material with the reactant. Preferably, the support member includes a plurality of apertures, and each aperture may comprise a hole of circular, oval, square, rectangular or other desired shape.

The support member may also include a plug for closing the aperture and where there are a plurality of apertures, a plug for each aperture. The plug initially closes the aperture to isolate the seal element, preventing fluid communication between the seal element and the interior of the support member. The aperture may be openable by deformation or fracture of the plug, for example, by expansion of the support member. The plug may be hollow and may include a cap for closing the aperture, the cap being removable to allow fluid flow through the plug. The plug may extend into the bore of the support member and the cap may be removed on expansion of the support member or in a separate procedure. Alternatively, the plug may be adapted to be

pulverised or crushed to open the aperture, for example, on expansion of the support member, and may be of a ceramic or other suitable material.

5 Additionally or alternatively, the plug may be removable. The plug may be adapted to releasably engage the aperture. For example, the aperture may be threaded and the plug may be threaded for engaging the aperture. On expansion of the support member, the aperture may be deformed causing the plug to become disengaged, allowing
10 fluid flow. Alternatively, the plug may engage the aperture in a friction fit, or may carry a snap ring or the like for engaging a groove in a wall of the aperture in a snap-fit. The plug may likewise disengage the aperture on expansion.

15 The support member may be at least partly slotted and may at least partly comprise slotted tubing. In tubing of this type, the slots open up during expansion to form apertures which may typically, but are not required to be generally square or diamond shaped,
20 depending upon the nature of the slots present in the unexpanded support member.

 The seal may further comprise a screen member provided between the seal element and the support member. The screen member may be provided between the chamber and
25 the support member. This prevents escape of filler

material. Where the filler material comprises a granular solid, a pore or mesh size of the screen member may be smaller than or at most equal to the average grain size of the granular material. This ensures that the granular material cannot escape. It will be understood that following mixture with the reactant and before the reaction takes place, the resultant solids/fluid mixture is heavily laden with the filler material, and the mixture is thus of a grain size greater than the screen mesh size and cannot escape through the screen member.

The seal may further comprise at least one reinforcing member for reinforcing the seal element to support the seal element during inflation. The seal may include a reinforcing member at each end of the seal element to contain inflation of the seal element. The reinforcing member may contain the inflation pressure acting to inflate the seal element. The reinforcing members may comprise ribs, fingers, a collar or the like mounted between the support member and the seal element, and may be of a metal composite, carbon fibre, or other suitable material. The reinforcing member may be integral or separate from the seal element.

The expandable tubular extending between the first and second seals may comprise a perforated tubular such as an expandable sandscreen as disclosed in International

Patent Publication No. WO97/17524 (Shell).

Alternatively, the expandable tubular may comprise a solid expandable tubular. The expandable tubular may comprise a plurality of lengths of tubing coupled
5 together.

The seal may include a sandscreen or an alternative perforated screen or the like located around the seal element, the sandscreen adapted to be expanded at least in part by inflation of the seal element. This allows a
10 precise expansion of the sandscreen in a desired location by inflation of the seal element. The seal assembly may comprise a sandscreen located around the seal elements. Thus where the seal assembly comprises a number of seals, a selected one or more seals may be inflated to expand
15 the sandscreen in a desired location or number of locations. It will be understood that the sandscreen may extend over a long section of a borehole and that this allows precise expansion of the sandscreen into contact with the borehole wall at one or a number of desired
20 locations.

~~According to a third aspect of the present~~
invention, there is provided an expandable seal assembly for sealing at least part of a wall of a well borehole, the assembly comprising:

first and second spaced expandable seals for sealing engagement with the wall of the well borehole at spaced locations, each expandable seal comprising an expandable tubular support member and an inflatable seal element mounted externally of the expandable tubular support member for inflation radially outwardly into sealing engagement with the well borehole wall; and

an expandable sandscreen extending between the first and second spaced expandable seals.

10 The sandscreen may comprise a sandscreen as disclosed in International Patent Publication No. WO97/17524. The sandscreen may comprise an inner expandable support tubing, an outer expandable protective tubing and a filter screen sandwiched between the inner and outer tubing. The filter screen may comprise overlapping filter sheets coupled along an axial edge to the inner tubing. The sandscreen may thus comprise the applicant's commercially available expandable sand exclusion tubing, sold under the ESS trade mark.

15 Preferably, the assembly further comprises a solid tubular coupled to one of the first and second expandable seals, and may comprise a solid tubular coupled to both the first and second seals. Coupling solid tubular to the seals allows isolation of a formation when using an assembly including an expandable sand exclusion device.

20

25

The solid tubular is preferably expandable. This minimises restriction of the borehole diameter. The assembly may comprise a plurality of expandable seals and a plurality of expandable sandscreens. Sections of sandscreen may be coupled together to form a string with seals spaced along a length of the string. This allows the sandscreen to be provided across a relatively large formation or a long portion of the borehole wall. There may be a number of lengths of sandscreen provided alternately between lengths of solid tubular. This allows isolation of a number of separate parts of the borehole wall.

According to a fourth aspect of the present invention, there is provided a method of sealing at least part of a well borehole, the method comprising the steps of:

locating an expandable seal in the well borehole;
expanding a tubular support member of the expandable seal; and
inflating a seal element mounted on the tubular support member radially outwardly into sealing engagement with the well borehole.

The method may comprise locating a sandscreen or the like around the seal and expanding the sandscreen by inflating the seal element.

According to a fifth aspect of the present invention, there is provided a method of sealing at least part of a well borehole, the method comprising the steps of:

5 coupling first and second expandable seals to opposite ends of an expandable tubular to form an expandable seal assembly;

 locating the expandable seal assembly in the well borehole;

10 expanding tubular support members of the first and second expandable seals; and

 inflating seal elements mounted on the tubular support members radially outwardly into sealing engagement with the well borehole.

15 Preferably, the seal is located in an unlined borehole, to allow sealing in an open hole. Alternatively, the seal may be located in a tubing lined borehole such as within casing, liner or other tubing. Thus, for example, the seal may be located in a
20 deteriorated casing or lining.

 Preferably, the support member is mechanically expanded. For example, a tubing expansion tool such as that disclosed in the Applicant's earlier International Patent Publication No. WO00/37766 may be run through the
25 seal assembly for expanding the tubular support member

and the seal element. The seal element may also be expanded when the support member is expanded.

5 The seal element may be inflated by supplying a fluid under pressure to the seal element. The fluid may be supplied to a chamber between the support member and the respective seal element. The fluid may be pressurised above ambient pressure in the region of the seal. Preferably, the fluid is pressurised above the pore pressure of the adjacent formation.

10 The method may further comprise maintaining the seal element in sealing engagement with the borehole. The fluid may react with a filler material which may be provided in a chamber of the seal and which may comprise a granular material, to form a single solid or viscous mass maintaining the seal element inflated.

15 A plurality of the seals may be coupled together to form a string of expandable seals. The seal string may be used for sealing over a relatively large length of borehole, for example, to provide enhanced sealing in a particularly problematic formation.

20 ~~The expandable tubular may also be expanded. In~~
this fashion, restriction of the borehole diameter is minimised following expansion.

25 The borehole may be underreamed, drilled to a larger diameter or otherwise enlarged prior to location of the

seal in the borehole. In this fashion, following expansion of the seal, the minimum internal diameter of the seal is sufficient to allow further drilling of the borehole whilst minimising reduction in bore diameter.

5 The method may comprise locating a sandscreen or the like around the seal and expanding the sandscreen by inflating the seal element.

BRIEF DESCRIPTION OF DRAWINGS

10 Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying figures, in which:

Fig. 1 is a schematic cross-sectional illustration of a step in the procedure of drilling and casing a borehole;

15 Fig. 2 is a longitudinal, partial sectional view of a seal in accordance with an embodiment of the present invention, shown in an unexpanded configuration;

Fig. 3 is a view of the borehole of Fig. 1 following an underreaming procedure;

20 Fig. 4 is an enlarged view of a portion of the borehole of Fig. 3 following location of a seal assembly in accordance with an embodiment of the present invention, incorporating the seal of Fig. 2, the seal assembly shown in an unexpanded configuration;

Figs. 5 and 6 are views of the seal assembly of Fig. 4 shown in an expanded, uninflated and an expanded, inflated configuration, respectively;

5 Figs. 7-9 are views of the seal of Fig. 2 shown during various stages in a procedure for expanding and inflating the seal (Fig. 7 on same sheet as Fig. 2); and

Fig. 10 is a schematic view of a string located in a borehole incorporating seal assemblies including the seal of Fig. 2 and shown in an expanded configuration.

10 DETAILED DESCRIPTION OF DRAWINGS

Referring firstly to Fig. 1, there is shown a schematic illustration of a step in the procedure of drilling and casing a borehole 10. The borehole 10 is initially drilled to a first depth 12 and logged to
15 determine certain geological characteristics of the rock formations in the region of the borehole. A casing 14 has then been installed and cemented at 16 in an upper section 18 of the borehole 10, which extends to surface. The borehole 10 is then continued by drilling a smaller
20 diameter borehole section 20 beyond the end of the casing
~~14 through a number of rock formations illustrated at 22-~~
30.

In this example, during drilling of the section 20, the rock formation 28 has unexpectedly been found to be
25 highly permeable, and drilling fluid has been lost into

the formation 28. Loss of drilling fluid is detected by a drop in the pit volume of drilling fluid and drilling procedures have been suspended.

To prevent further loss of drilling fluid into the formation 28 and to allow well completion procedures to be subsequently carried out, a seal assembly according to an embodiment of the invention is to be located in the section 20 straddling the formation 28, as will be described below.

Turning now also to Fig. 2, there is shown a seal in accordance with a preferred embodiment of the present invention, the seal indicated generally by reference numeral 32. The seal assembly incorporates two such seals, one of which will be described in detail below.

The seal 32 includes a diametrically expandable support tube 34, and an inflatable seal element in the form of a seal tube 36, mounted on the support tube 34. The seal tube 36 is typically of an elastomeric material such as a swelling elastomer, or of rubber materials including natural rubber. Only the seal tube 36 is shown in

section in the figure, for illustration purposes. A

chamber 38 is defined between the seal tube 36 and the support tube 34. In use, the support tube 34 is expanded to bring the seal tube 36 closer to or possibly into contact with the wall of the borehole section 20,

depending on factors including the dimensions of the borehole. The seal 32 is then inflated by inflating the chamber 38, to urge the wall 40 of the seal tube 36 radially outwardly into sealing engagement with the wall of the borehole section 20. As will be described, location of the seal 32 allows the rock formation 28 to be straddled and isolated, preventing further loss of drilling fluids.

The seal 32 is located in the borehole 10 as follows. Once it has been determined that the rock formation 28 is causing loss of drilling fluid, the borehole section 20 is firstly underreamed at 42, as illustrated in Fig. 3, to a larger bore diameter across the rock formation 28, and a seal assembly including the seal 32 of Fig. 2 is located in the borehole to isolate the rock formation 28. The seal assembly 44 is shown in Fig. 4, and includes an upper seal 32a coupled to a lower seal 32b by an expandable solid tubular 46, made up of connected expandable tubing sections. Each of the seals 32a and 32b are of the same construction as the seal 32 shown in Fig. 2, and like components share the same reference numerals with the addition of suffixes a, b respectively. The assembly 44 is run into the borehole 10 on a string of expandable solid tubing 48 and is located in the underreamed section 42. The tubing 48 is

suspended from the upper casing 14 by a conventional hanger/packer assembly 49, allowing location of the seal assembly 44 in the borehole section 20. Further expandable tubing 51 extends from the lower seal 32b deeper into the borehole.

A tubing expansion tool such as that disclosed in the applicant's earlier International patent publication No. WO00/37766 is then run and located in the tubing 51 below the seal 32b. The expansion tool is then activated and translated axially through the seal assembly 44 in a bottom-up or top-down expansion procedure, to diametrically expand the seal assembly 44 and the tubing 48 to a level below the cemented casing 14. It will be understood that part of the tubing 51 and indeed further assemblies downhole of the seal assembly 44 may also be expanded.

Expansion of the assembly 44 brings the seals 32a and 32b closer to the borehole wall 50, and the tubular 46 is also diametrically expanded. Once the whole seal assembly 44 has thus been fully expanded, as shown in Fig. 5, the expansion tool is deactivated, pulled out and recovered to surface.

The respective chambers 38a, 38b of the seals 32a, 32b are then inflated as shown in Fig. 6, to inflate the seal tubes 36a, 36b radially outwardly into sealing

engagement with the walls of impermeable rock formations 26, 30 respectively. This generates a seal load against the formations such that the annulus 45 between the borehole wall 50 and the assembly 44 is sealed, isolating the rock formation 28 and preventing loss of further fluids into the formation 28.

The seal 32 and its method of operation will now be described in more detail with reference to Fig. 2 and Figs. 7-9, which show various stages during the expansion and inflation of the seal 32. It will be noted that Fig. 2 has been reproduced at sheet 7/9 of the drawings for ease of reference and comparison with Figs. 7-9. The following description applies equally to the seals 32a, 32b.

As shown in Fig. 2, the support tube 34 includes an upper threaded box 52 for coupling to the tubing 48, and a lower end 54 forming a male threaded pin for connection to the expandable tubular 46. The support tube 34 also includes a number of apertures 56 which allow fluid communication between the support tube interior 58 and the inflatable chamber 38, and a screen 60 is attached to the exterior of the support tube 34 and extends over the apertures 56. The apertures 56 are each threaded and a corresponding threaded plug (not shown) is engaged in each aperture to initially isolate the chamber 38,

preventing fluid communication with the support tube bore 58. This prevents premature inflation of the seal tube 36.

Each plug is hollow and includes an end cap which protrudes into the support tube bore 58. Thus, on expansion of the support tube 34, the end caps are sheared off, allowing fluid flow through the hollow portions of the plugs for subsequent inflation of the seal tube 36. Additionally, as will be described below, the apertures 56 are deformed on expansion, tending to cause the plugs to disengage the apertures and to fall out, opening the apertures.

As discussed above, the seal tube 36 is of an elastomeric material or a rubber such as a natural rubber and a series of reinforcing ribs 62 are provided integrally with and at opposite ends of the seal tube 36 to provide structural support. The ribs 62 contain the inflation pressure of the seal 36 when inflated, as shown in Fig. 9 and may be metal, composite, carbon-fibre or the like.

The outer wall of the chamber 38 is defined by the seal tube 36 and the chamber 38 is in fluid communication with the support tube bore 58 through the screen 60 and apertures 56. A solid granular filler material 64 is provided in the chamber 58 and the average grain size of

the filler is at least equal to the mesh size of the screen 60. This prevents the granular filler from passing through the apertures 56 into the support tube bore 58. The filler material typically comprises a mixture of bentonite (absorbent aluminium silicate clay) and a dry, powdered water soluble polymer such as polyacrylamide, as disclosed in US patent no. 3,909,421 the disclosure of which is incorporated herein by way of reference.

Following location of the seal assembly 44 in the borehole 10 as shown in Fig. 4, the expansion tool is run through the seals 32a, 32b, as described above. The support tubes 34a, 34b are thus expanded to a greater internal diameter, as shown in Fig. 7, causing a corresponding expansion of the seal tubes 36a, 36b. This brings the seal tube walls 40a, 40b closer to and possibly into contact with the borehole wall 50, which may therefore provide a partial seal load between the seals 32 and the borehole. This expansion also ovalises the apertures 56a, 56b of the respective support tubes 34a, 34b as shown in Fig. 7 and opens the apertures by fracturing the aperture plugs, as described above.

A reactant fluid inert to well and drilling fluids is then supplied to the seals 32, to inflate the chambers 38a, 38b. The fluid is supplied using an inflation tool

such as the applicant's commercially available Selective Cement Inflation Tool (SCIT), which is run into the lower seal 32b, sealing against the support tube 34b inner wall above and below the apertures 56b. A volume of fluid is then forced under pressure into the chamber 38b.

As shown in Fig. 8, the fluid is forced through the apertures 56 in the support tube 34 and into the chamber 38 as indicated by the arrows F. The fluid is pressurised above the pore pressure of the surrounding rock formations and the chamber 38 is inflated as shown in Fig. 9, urging the seal wall 40 radially outwardly. This generates a large pressure-energised seal load between the seal and the adjacent impermeable rock formation.

The reactant fluid which is supplied to the chamber 38 mixes with the filler 64 and the resultant solids-laden fluid 66 cannot pass through the screen 60, as the grain size of the swollen filler 64 remains greater than the screen mesh size. Accordingly, the applied pressure may be relaxed once the seal 32 has been inflated.

The granular filler 64 reacts with the reactant fluid and the resultant mixture solidifies over a period of time, to maintain inflation of the chamber 38 and thus to maintain the enhanced seal load on the borehole wall 50. This procedure is repeated for the upper seal 32a,

and the annulus 45 is thus sealed, isolating the formation 28 from the borehole 10, preventing further fluid losses.

Where the filler is a bentonite/polyacrylamide mixture, water is used as the reactant fluid. When mixed with water downhole, a clay is formed and the water soluble polymer flocculates and congeals the clay to form a much stronger and stiffer cement-like plug. Various other filler materials, such as those disclosed in US patent nos. 4,633,950; 4,503,170; 4,475,594; 4,445,576; 4,442,241 and 4,391,925, the disclosures of which are incorporated hereby by way of reference, may alternatively be employed.

As the solids/reactant mixture reacts and sets, the mixture may lose bulk volume. This loss of volume may be offset in several ways. Firstly, seal tube 36, where of a material such as a swelling elastomer or a natural rubber, adsorbs hydrocarbons (well fluids) or other fluids over a period of time and tends to expand. This further expansion of the seal tube 36 enhances the seal load on the rock formation over time.

Secondly, in certain situations, for example, where the seal 32 is set in a formation such as an unstable formation tending to collapse inwardly over time, the re-

stressed formation will move inwardly towards the seal element 36, to retain the seal load on the formation.

Thirdly, as the seal 32 is inflated to a pressure above the pore pressure of the rock formation, this
5 overpressurisation maintains an effective seal load despite loss of bulk volume.

Fourthly, the relatively high temperatures experienced downhole tend to cause the seal 32 to swell.

In alternative assemblies, the seal assembly 44 may
10 be located in the borehole section 20 in such a way as to avoid or minimise restriction of the borehole. The assembly 44 may be self-hanging by expansion of the seals 32 into contact with the borehole wall. Alternatively, an expandable centraliser may be used to locate and hang
15 the assembly 44 in the borehole.

Following completion of this procedure, the borehole
10 can then be continued to the next desired depth and the next casing run through the assembly 44 and cemented in a similar fashion to the upper casing 14, without any
20 additional reduction in bore diameter.

In further alternatives, the assembly 44 may be hung
in an open hole independently of existing casing from a casing patch or using any other suitable method.

Turning now to Fig. 10, there is shown a schematic
25 view of a tubing string 66 located in a borehole 100, the

string 66 comprising a number of assemblies 144 coupled together. Like components of the assemblies 144 share the same reference numerals as the assembly 44 of Figs. 1-9, incremented by 100. Each assembly generally comprises a tubular 146 and a pair of expandable seals 132.

In more detail, the string 66 comprises a number of sand exclusion tubing-based assemblies 144a located alternately between solid expandable tubular assemblies 144b. The assemblies 144a are each located adjacent a hydrocarbon bearing rock formation, allowing recovery of well fluids through the sand screen. Running sand screen as part of an assembly including the expandable seals 132 allows the tubing to be located in open hole, expanded and the seals 132 inflated to provide sealing with the borehole wall. The string 66 is expanded in a bottom-up or top-down expansion procedure.

As shown in the figure, the uppermost assembly 144a is located adjacent a hydrocarbon bearing formation 68. An upper solid expandable tubular 148 extends from casing 114 and is secured by a conventional liner hanger in the casing. The uppermost assembly 144a is sealed in the borehole 100 by expanding and inflating the seals 132 against impermeable rock formations above and below the formation 68, ensuring that fluid entering the borehole

annulus 145 is directed through the sand screen 146a and is thus recovered to surface. The solid expandable assembly 144b immediately below the upper sand exclusion tubing-based assembly 144a shares the seals 132 of the adjacent sand exclusion assemblies and includes a solid expandable tubular 146b. A lower sand exclusion tubing assembly 144a' is similarly located adjacent a formation 68'.

Accordingly, each sand exclusion tubing-based assembly 144a is located between solid expandable tubulars. In this fashion, the formations 68, 68' adjacent the sand exclusion assemblies 144a, 144a' are isolated, preventing passage of fluid up the borehole annulus 145 to an alternative location. Furthermore, migration of fluids from the formations 68, 68' along the borehole annulus 145 to non-producing formations is prevented. In a similar fashion the seals 132 also prevent fluid migration along the borehole annulus 145 from water producing zones 70, 70' and through the sand screens 146a, 146a' of the assemblies 144a, 144a' placed across hydrocarbon zones 68 and 68', thus isolating the water and allowing production of only the hydrocarbons.

It will be understood that Fig. 10 is a schematic illustration and that the string 66 will typically include multiple lengths of sand exclusion tubing coupled

together and extending hundreds or thousands of feet along the length of the borehole 100. A number of seals 132 would be provided spaced along the length of the string.

5 In an alternative embodiment of the invention, sandscreen such as the applicant's ESS or other perforated tubing may be located around the seal 32. The sandscreen may be expanded on inflation of the seal element 36. An assembly comprising a number of the seals
10 32 may carry sandscreen along a length of the assembly located around the seals, and the sandscreen may thus be expanded at one or more desired locations by inflation of the chamber of a seal within the sandscreen. Accordingly, the sandscreen can be precisely expanded
15 where required at various locations along the length of a borehole. It will be understood that, to allow fluid flow through the sandscreen into the assembly, the seals or selected ones of the seals may be coupled together by perforated, expandable tubing.

20 It will be understood by those skilled in the art that the above described embodiments and concepts of the invention are by way of illustration only and are not intended to limit the scope of the invention. Accordingly, various modifications may be made to the

foregoing within the spirit and scope of the present invention.

For example, the seal element may comprise a plastics or other suitable material.

5 The seal may comprise a plurality of separate chambers. Thus a selected one or more chamber of the seal may be inflated as desired.

10 The seal/seal assembly may also be used in a tubing lined borehole, for example, where a casing has deteriorated causing undesired fluid ingress. In these circumstances, the seal/assembly may be used as a "patch" to straddle the damaged tubing section, although there would be a resultant decrease in the tubing bore diameter.

15 The seal element may be urged radially by exerting an axial force on the seal element. For example, the chamber may be provided at one end of the seal element and, when inflated, the chamber may exert an axial force on the seal element, to squeeze the seal element and urge
20 it radially outwardly. Thus, the chamber may be defined

between an upper or lower end of the seal element and the support tube. Alternatively, there may be one such chamber at each end of the seal element. The seal element may be of any suitable swelling (for example, in

water or hydrocarbons such as oils) or non-swelling material capable of acting as a seal.

When the seal is expanded, the seal element may be brought into contact with the borehole wall providing an initial seal which is enhanced when the seal element is inflated. This depends on a number of factors including relative dimensions of the seal/borehole and the nature of the drilled borehole.

The seal assembly may be expanded in either a bottom-up or top-down expansion procedure appropriate to the peculiarities of the well in which the seal assembly is to be located. For example, a top-down expansion procedure is suitable where large forces (imposed by heavy drill collars in the tool string) can be applied to an expansion tool. This may not be possible where the well is deviated and/or where a workover rig is used for deploying the tool; in these cases, a bottom-up expansion procedure may be more suitable.

The apertures in the support tube may be of any suitable shape in addition to circular. For example, part of the support tube may be slotted or otherwise perforated and on expansion may form diamond or other shaped openings. The plugs may be fitted into the apertures in a friction fit, or a snap fit, for example, the plugs may carry a snap ring for engaging a groove in

a wall of the apertures, or vice versa. Thus, on expansion of the support tube whereby the apertures are deformed, the plugs may disengage and fall out of the apertures. The plugs may also or alternatively be of a material which is crushed or pulverised on expansion of the support tube by the expansion tool, to open the apertures. The plugs may thus be of a ceramic or like material.

The inflatable seal elements may be inflatable in any suitable fashion, for example, using a supplied gas or other fluid, or by generation of a gas downhole, for example by reaction of a suitable material in the seal with a suitable reactant fluid.

WE CLAIM:

1. An expandable seal for sealing at least part of a wall of a well borehole, the expandable seal comprising:
an expandable tubular support member; and
5 an inflatable seal element mounted externally of the expandable tubular support member for inflation radially outwardly into sealing engagement with at least part of the wall of the well borehole.
- 10 2. A seal as claimed in claim 1, wherein the expandable seal is adapted for sealing at least part of a wall of an unlined well borehole.
- 15 3. A seal as claimed in claim 1, wherein the expandable seal is adapted for sealing at least part of a wall of a tubing-lined borehole.
- 20 4. A seal as claimed in any preceding claim, further comprising at least one chamber adapted for inflation to urge the seal element radially outwardly.
5. A seal as claimed in claim 4, comprising a plurality of chambers.
- 25 6. A seal as claimed in claim 4 or 5, wherein the chamber is located radially inwardly of the seal element.

7. A seal as claimed in any one of claims 4 to 6, wherein the chamber is annular and at least partially defined by the seal element and the support member.

5 8. A seal as claimed in any one of claims 4 to 7, wherein the chamber is adapted to be initially isolated from annulus pressure and fluid in the borehole.

9. A seal as claimed in any preceding claim, wherein
10 the seal element is expandable such that expansion of the support member also expands the seal element.

10. A seal as claimed in any preceding claim, further comprising a filler material adapted for maintaining the
15 seal element in sealing engagement with the borehole.

11. A seal as claimed in any preceding claim, further comprising a chamber adapted for inflation to urge the seal element radially outwardly, the chamber containing a
20 filler material adapted for maintaining the seal element under pressure in sealing engagement with the borehole.

12. A seal as claimed in either of claims 10 or 11, wherein the filler material is adapted to react with a
25 selected reactant to solidify and maintain the chamber in an inflated condition.

13. A seal as claimed in any one of claims 10 to 12, wherein the filler material comprises a granular solid material.

5 14. A seal as claimed in any preceding claim, wherein the seal is inflatable by supplying a fluid to the seal.

15. A seal as claimed in claim 14, comprising a reactant fluid for reacting with a filler material in the seal to
10 form a single, solid member for maintaining the seal inflated.

16. A seal as claimed in claim 14, wherein the fluid comprises a reactant for reacting with a filler material
15 in the seal to form a viscous mass, for maintaining the seal inflated.

17. A seal as claimed in any preceding claim, wherein the seal element is elastically deformable.
20

18. A seal as claimed in any preceding claim, wherein the seal element comprises an elastomeric material.

19. A seal as claimed in any preceding claim, wherein
25 the support member includes at least one aperture for

fluid communication between the seal element and the interior of the support member.

20. A seal as claimed in claim 19, wherein the support
5 member includes a plurality of apertures.

21. A seal as claimed in claim 19 or 20, wherein the
support member includes a plug for closing the aperture
to initially prevent fluid communication between the seal
10 element and the interior of the support member.

22. A seal as claimed in claim 21, wherein the aperture
is openable by deformation of the plug.

15 23. A seal as claimed in claim 21 or 22, wherein the
plug includes a hollow portion and an end cap for closing
flow through the hollow portion, and wherein the end cap
is removable to allow fluid communication through the
hollow portion.

20

24. A seal as claimed in either of claims 22 or 23,
wherein the plug is adapted to be crushed to open the
aperture.

25

25. A seal as claimed in any one of claims 21 to 24, wherein the plug is removable to allow fluid communication.

5 26. A seal as claimed in claim 25, wherein the plug is releasably engageable in the aperture and is adapted to disengage the aperture to allow fluid communication on expansion of the support member.

10 27. A seal as claimed in claim 19, wherein the support member is at least partly perforated.

28. A seal as claimed in claim 27, wherein the support member at least partly comprises slotted tubing.

15

29. A seal as claimed in any preceding claim, further comprising a filter screen member provided between the seal element and the support member.

20 30. A seal as claimed in claim 29, wherein the seal further comprises a granular solid filler material adapted for maintaining the seal element in sealing engagement with the borehole filler material, and wherein a pore size of the screen member is smaller than the
25 average grain size of the granular material.

31. A seal as claimed in any preceding claim, further comprising at least one reinforcing member for reinforcing the seal element to support the seal element during expansion.

5

32. A seal as claimed in claim 31, wherein the seal includes a reinforcing member at each end of the seal element to contain inflation of the seal element.

10

33. A seal as claimed in either of claims 31 or 32, wherein the reinforcing member is integral with the seal element.

15

34. A seal as claimed in either of claims 31 or 32, wherein the reinforcing member is separate from the seal element.

20

35. A seal as claimed in any preceding claim, comprising an expandable sandscreen located around the seal, the sandscreen adapted to be expanded by inflation of the inflatable seal element of the seal.

25

36. An expandable seal assembly for sealing at least part of a wall of a well borehole, the assembly comprising:

at least two expandable seals for sealing engagement with the wall of the well borehole, each expandable seal comprising an expandable tubular support member and an inflatable seal element mounted externally of the expandable tubular support member for inflation radially outwardly into sealing engagement with the well borehole wall.

37. An expandable seal assembly for sealing at least part of a wall of a well borehole, the assembly comprising:

first and second spaced expandable seals for sealing engagement with the wall of the well borehole at spaced locations, each expandable seal comprising an expandable tubular support member and an inflatable seal element mounted externally of the expandable tubular support member for inflation radially outwardly into sealing engagement with the well borehole wall.

38. An assembly as claimed in claim 37, further comprising an expandable tubular extending between the first and second spaced expandable seals.

39. An assembly as claimed in either of claims 37 or 38, wherein the first and second expandable seals each

comprise an expandable seal as claimed in any one of claims 1 to 34.

5 40. An assembly as claimed in either of claims 38 or 39, wherein the expandable tubular comprises an expandable sandscreen.

10 41. An assembly as claimed in claim 40, wherein the expandable sandscreen comprises an inner expandable support tubing, an outer expandable protective tubing and a filter screen sandwiched between the inner and outer tubing.

15 42. An assembly as claimed in any one of claims 38 to 41, further comprising a solid tubular coupled to one of the first and second expandable seals.

20 43. An assembly as claimed in any one of claims 38 to 41, further comprising a solid tubular coupled to both of the first and second expandable seals.

44. An assembly as claimed in either of claims 42 or 43, wherein the solid tubular is expandable.

25 45. An assembly as claimed in either of claims 38 or 39, wherein the expandable tubular extending between the

first and second seals comprises a solid expandable tubular.

46. An assembly as claimed in either of claims 38 or 39,
5 wherein the expandable tubular comprises an at least partly perforated tubular.

47. An assembly as claimed in any one of claims 28 to
46, comprising an expandable sandscreen located around
10 the seals, the sandscreen adapted to be expanded in one or more location by inflation of the inflatable seal element of a selected one or more seal.

48. An expandable seal assembly for sealing at least
15 part of a wall of a well borehole, the assembly comprising:

first and second spaced expandable seals for sealing
engagement with the wall of the well borehole at spaced
locations, each expandable seal comprising an expandable
20 tubular support member and an inflatable seal element mounted externally of the expandable tubular support member for inflation radially outwardly into sealing engagement with the well borehole wall; and

an expandable sandscreen extending between the first
25 and second spaced expandable seals.

49. A method of sealing at least part of a well borehole, the method comprising the steps of:

locating an expandable seal in the well borehole;

expanding a tubular support member of the expandable seal; and

inflating a seal element mounted on the tubular support member radially outwardly into sealing engagement with the well borehole.

50. A method as claimed in claim 49, wherein the seal is located in an unlined borehole.

51. A method as claimed in claim 49, wherein the seal is located in a tubing-lined borehole.

52. A method as claimed in any one of claims 49 to 51, wherein the support member is mechanically expanded.

53. A method as claimed in claim 52, wherein a tubing expansion tool is run through the seal to expand the tubular support member.

54. A method as claimed in any one of claims 49 to 53, wherein the seal element is expanded when the support member is expanded.

55. A method as claimed in any one of claims 49 to 54, further comprising maintaining the seal element in sealing engagement with the borehole.

5 56. A method as claimed in any one of claims 49 to 55, wherein the seal element is inflated by supplying a fluid under pressure to the seal element.

10 57. A method as claimed in claim 56, wherein the fluid is supplied to a chamber between the support member and the seal element.

15 58. A method as claimed in either of claims 56 or 57, wherein the fluid is pressurised above a pore pressure of a rock formation in the region of the borehole adjacent the seal.

20 59. A method as claimed in any one of claims 56 to 58, wherein the fluid reacts with a filler material in the seal to form a single solid mass maintaining the seal element inflated.

25 60. A method as claimed in any one of claims 56 to 58, wherein the fluid reacts with a filler material in the seal to form a viscous mass maintaining the seal element inflated and under pressure.

61. A method as claimed in any one of claims 49 to 60,
further comprising coupling a plurality of expandable
seals together to form a string of expandable seals,
5 locating the string of expandable seals in the well
borehole before expanding the tubular support member and
inflating the seal element of each expandable seal.

62. A method as claimed in any one of claims 49 to 61,
10 further comprising enlarging the borehole prior to
location of the seal in the borehole.

63. A method as claimed in claim 60, comprising
underreaming the borehole.

15 64. A method as claimed in any one of claims 49 to 63,
comprising providing an expandable sandscreen around the
seal and expanding the sandscreen by inflating the seal
element of the seal.

20 65. A method of sealing at least part of a well
borehole, the method comprising the steps of:

coupling at least one expandable seal including a
tubular support member and an inflatable seal element to
25 an expandable tubular and locating the expandable tubular
and expandable seal in the well borehole;

expanding the tubular support member of said expandable seal; and

inflating the seal element of said expandable seal radially outwardly into sealing engagement with the well borehole.

5
66. A method as claimed in claim 65, comprising coupling an expandable seal to opposite ends of the expandable tubular; expanding the tubular support members of said expandable seals; and inflating the seal elements of said expandable seals into sealing engagement with the well borehole.

10
67. A method as claimed in claim 65 or 66, further comprising expanding the expandable tubular.

15
68. A method as claimed in any one of claims 65 to 67, comprising providing an expandable sandscreen around the seal and expanding the sandscreen by inflating the seal element of the seal.

THIS PAGE BLANK (USPTO)

1/9

10 →


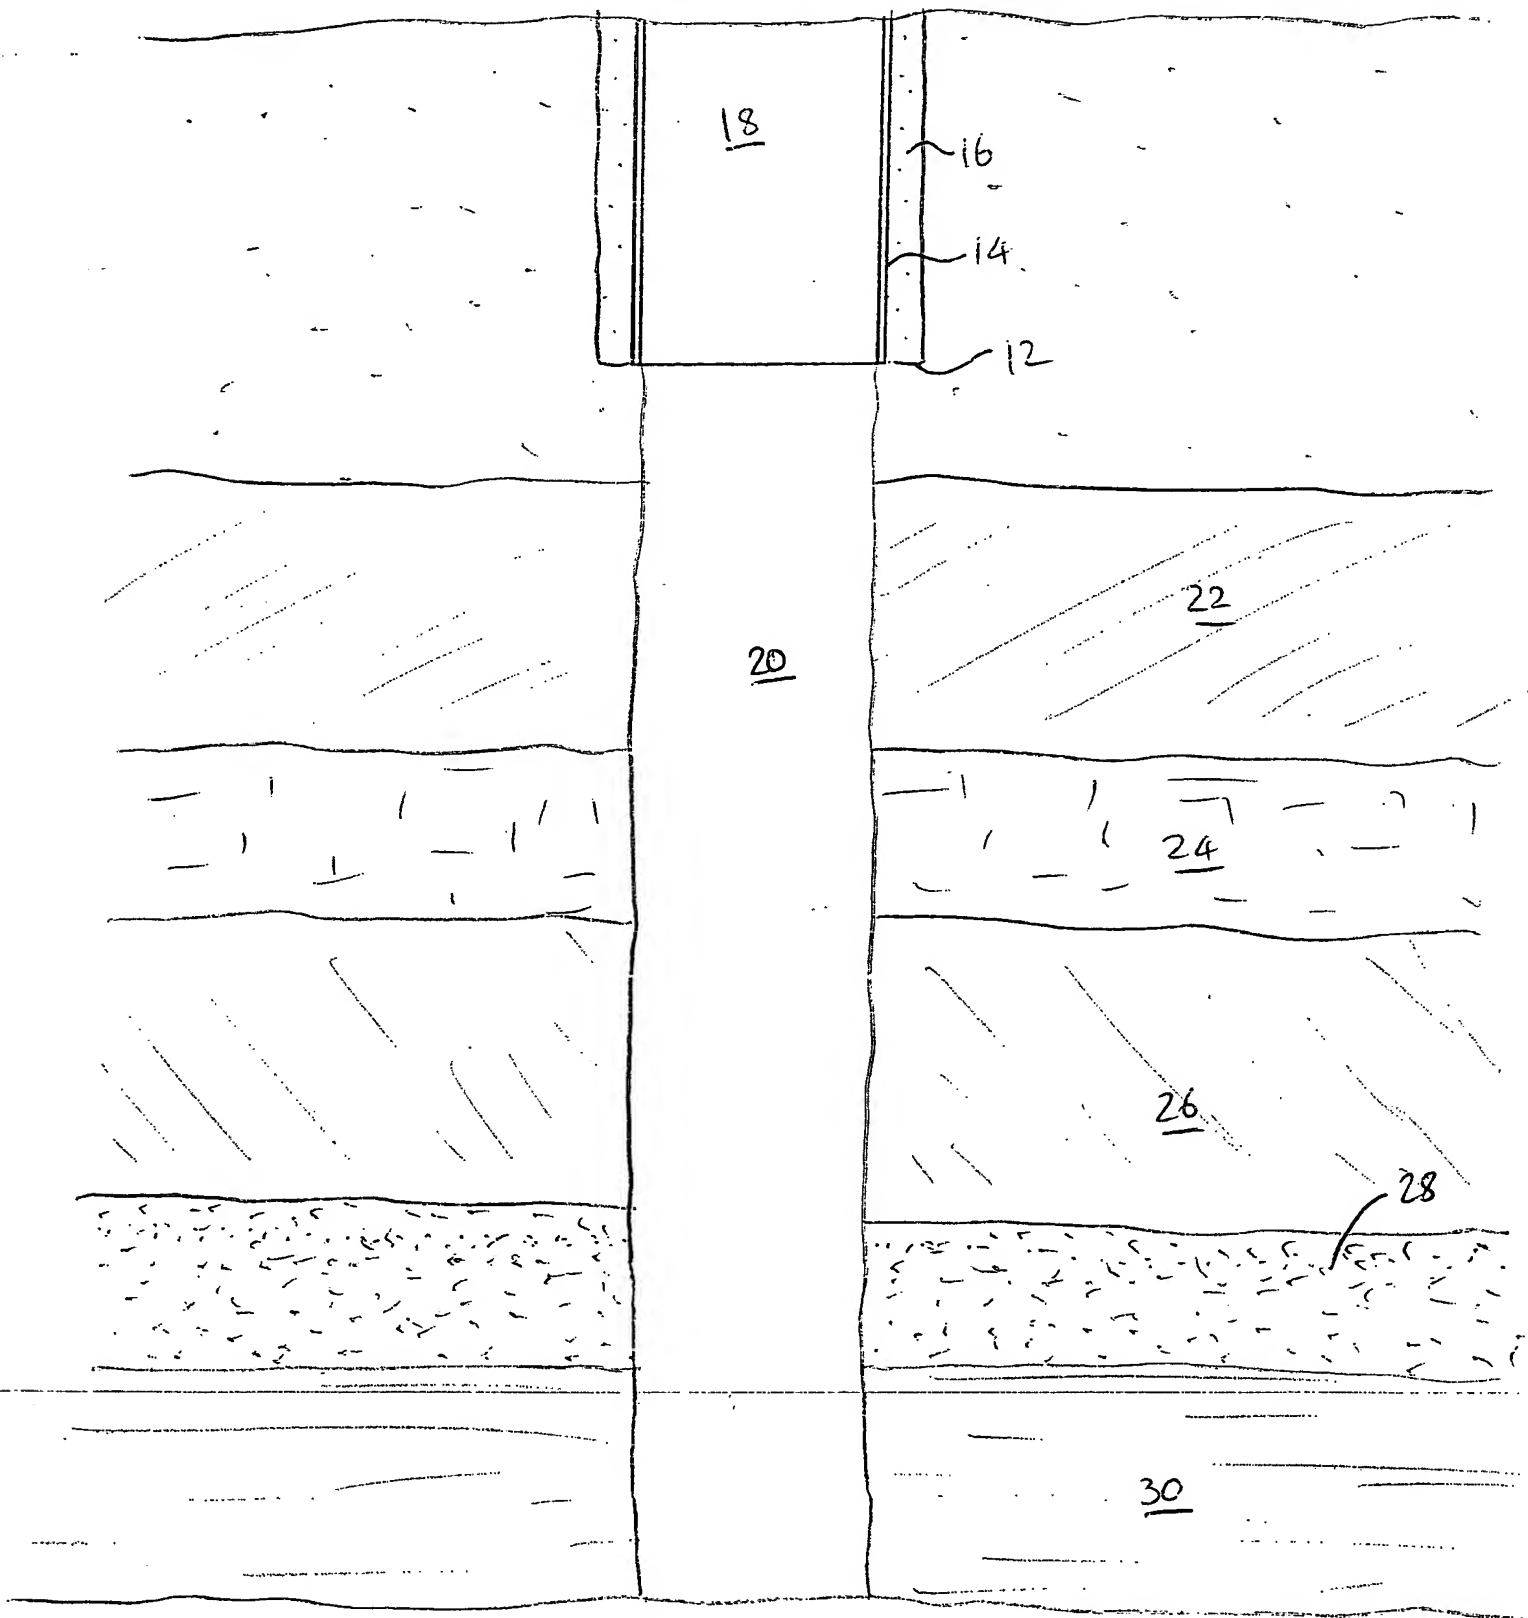


FIG 1

THIS PAGE BLANK (USPTO)

1. As Run in Hole

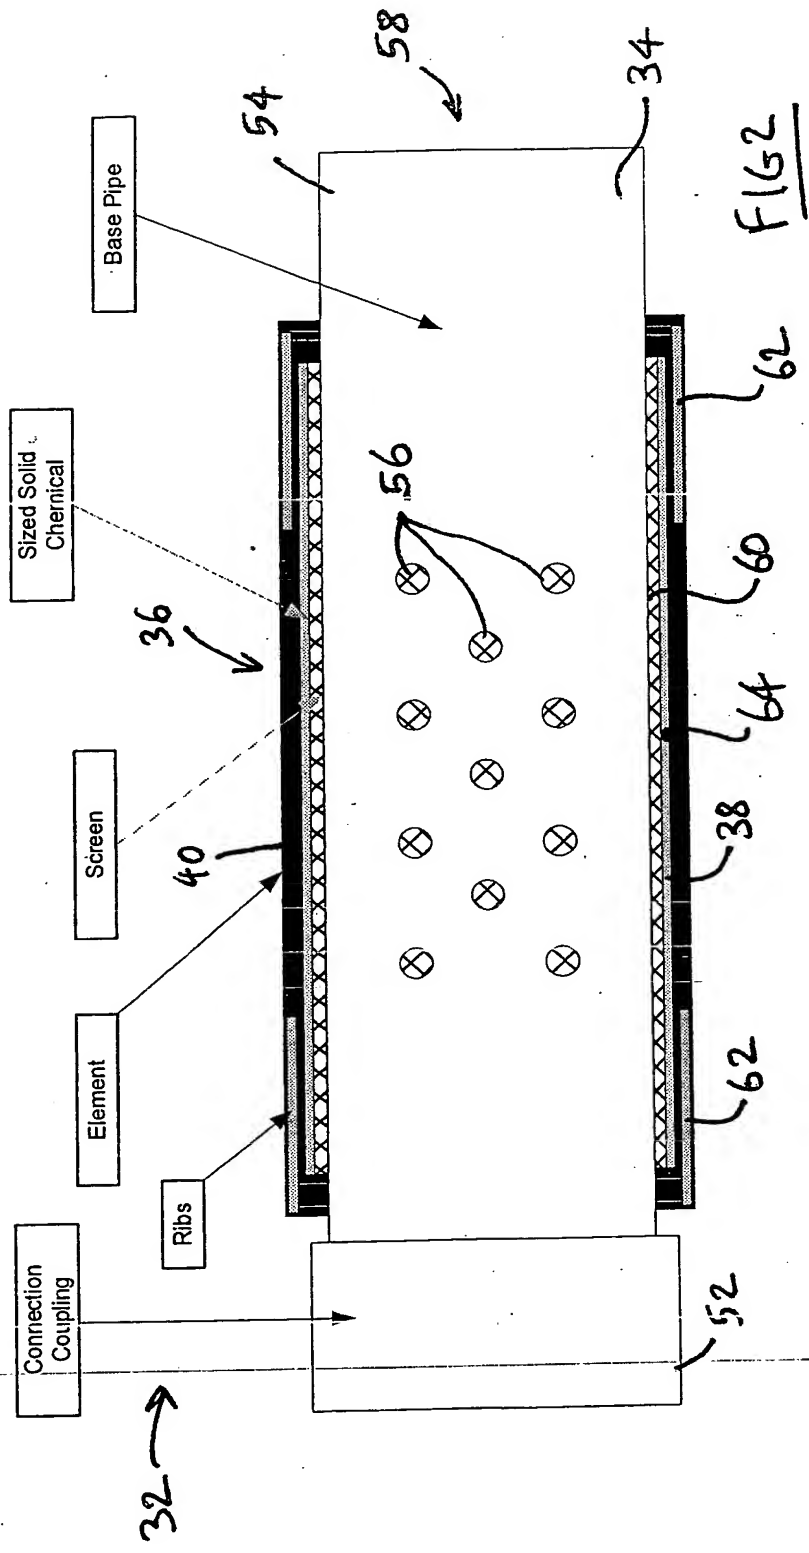

THIS PAGE BLANK (USPTO)

3/9

10 →

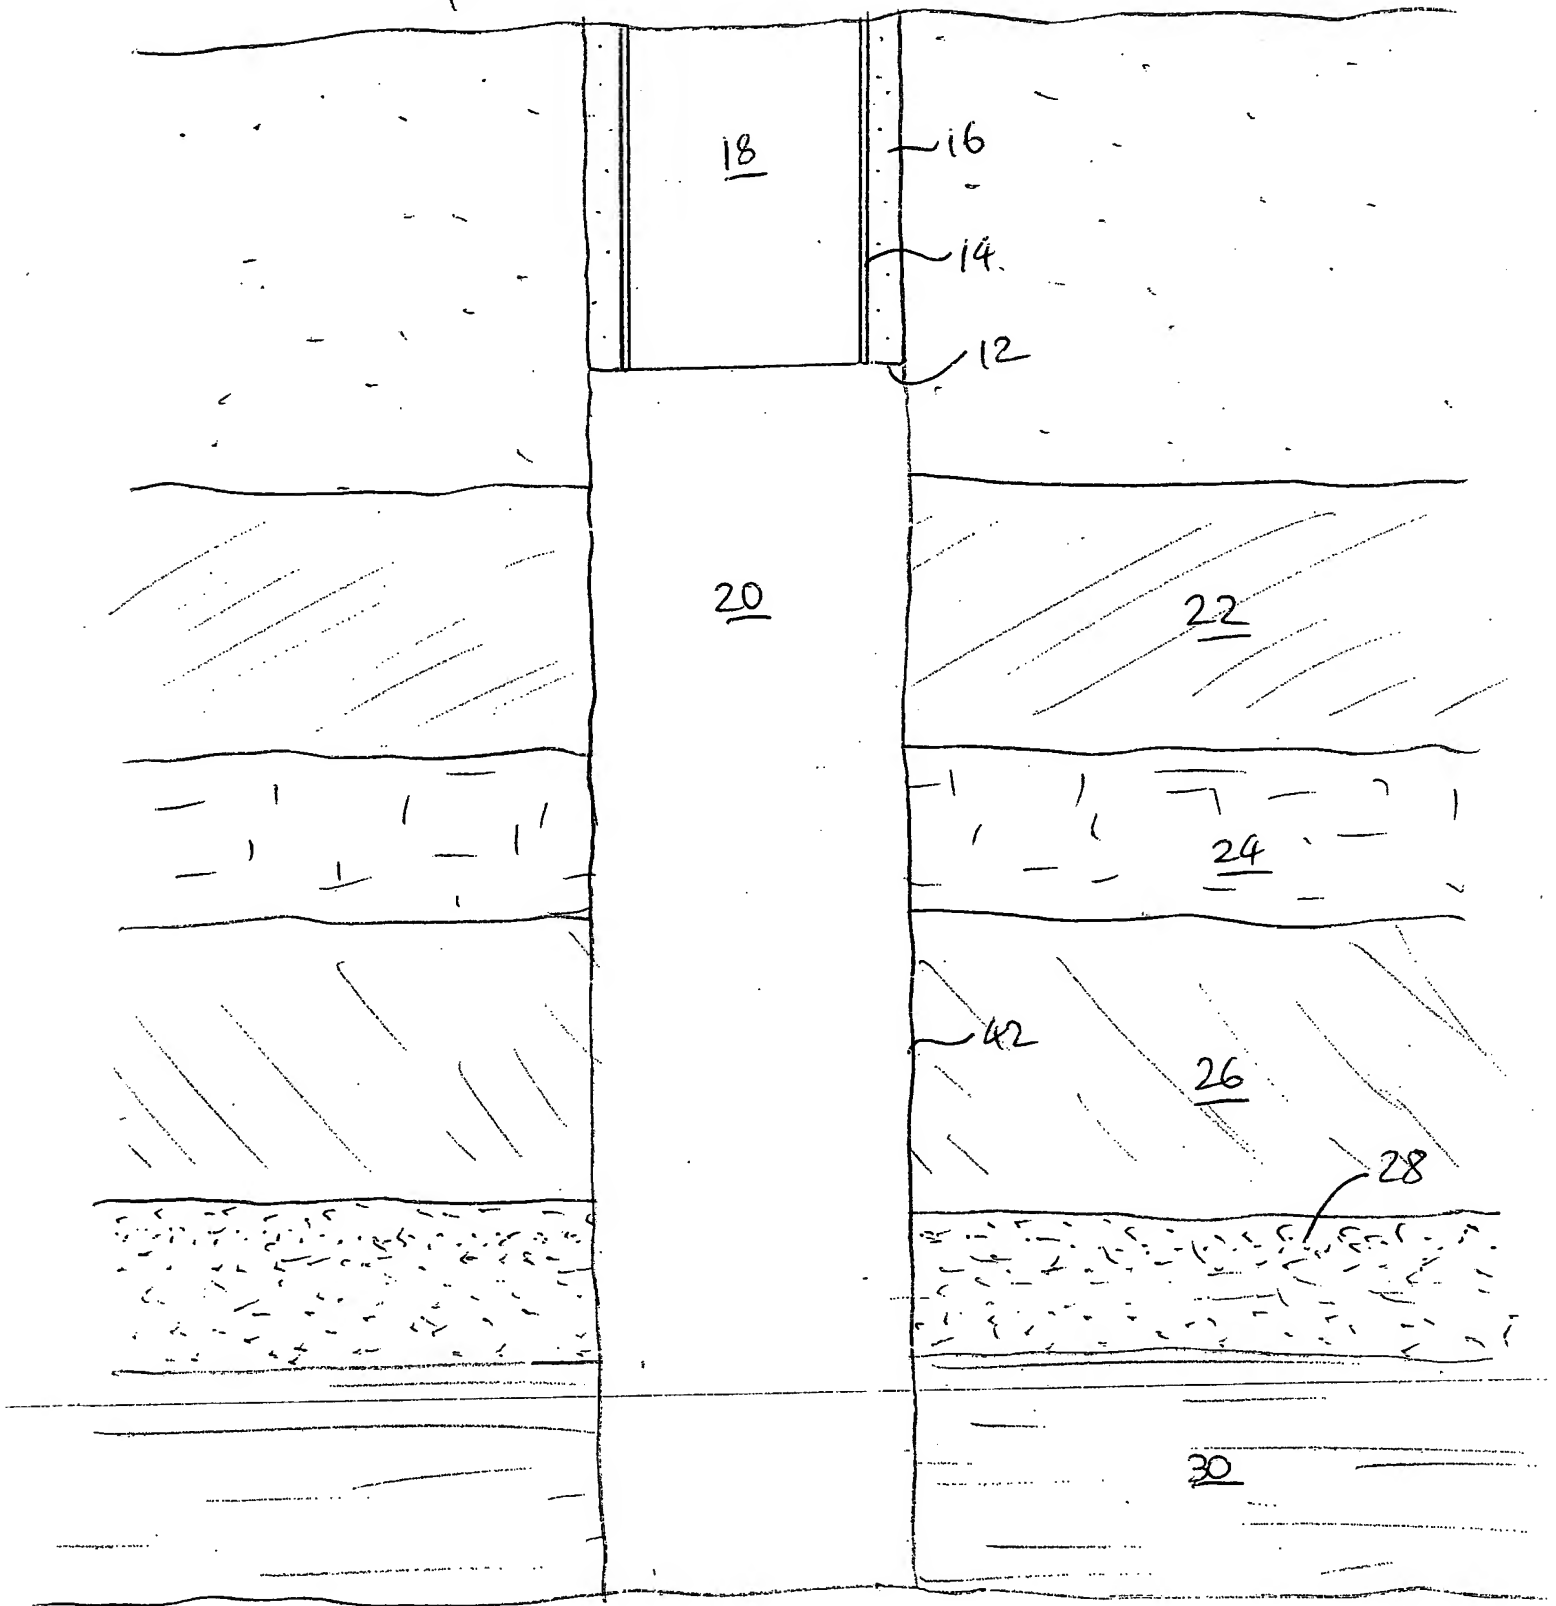


FIG 3

THIS PAGE BLANK (USPTO)

4/9

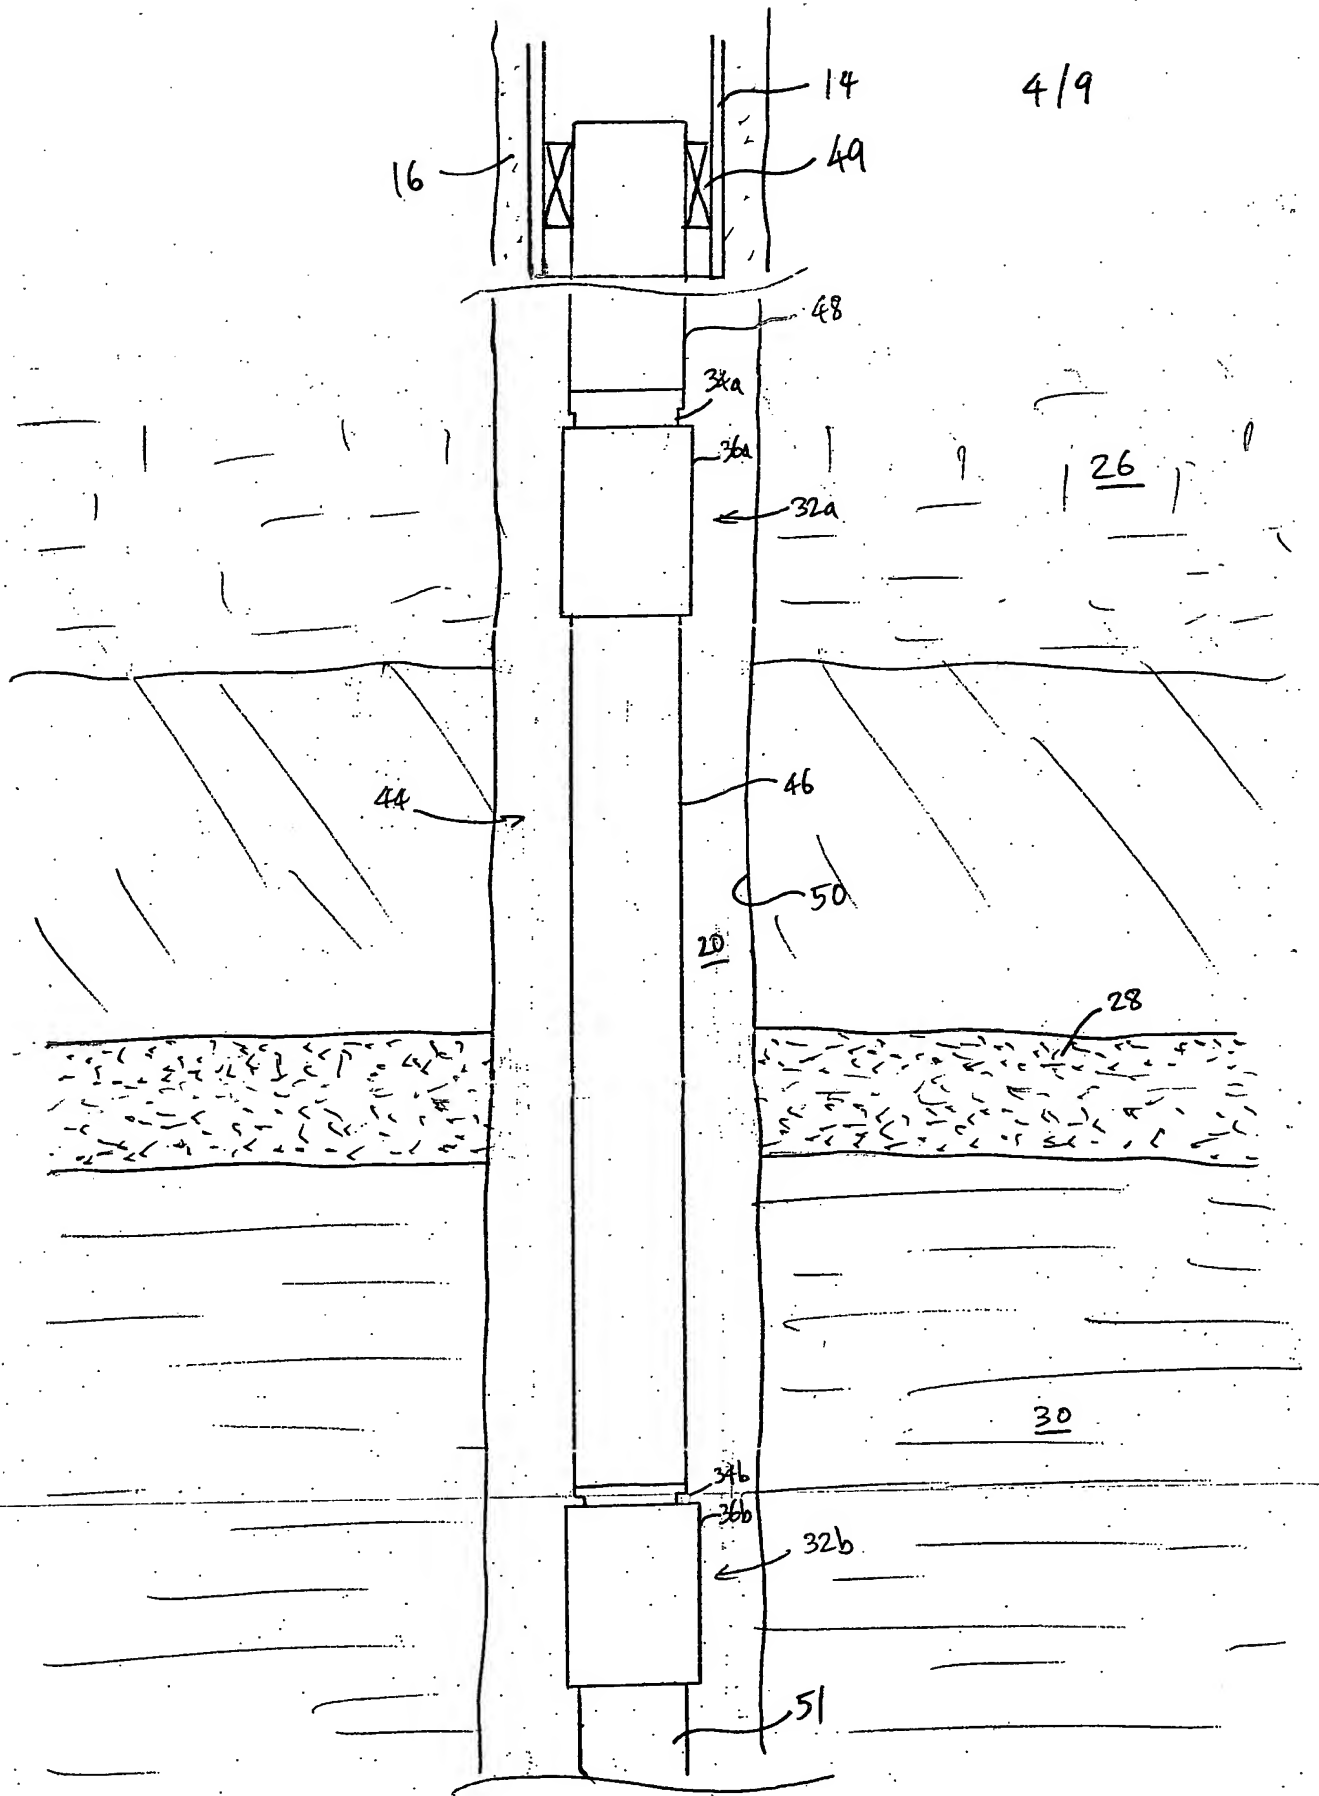


FIG 4

THIS PAGE BLANK (USPTO)

5/9

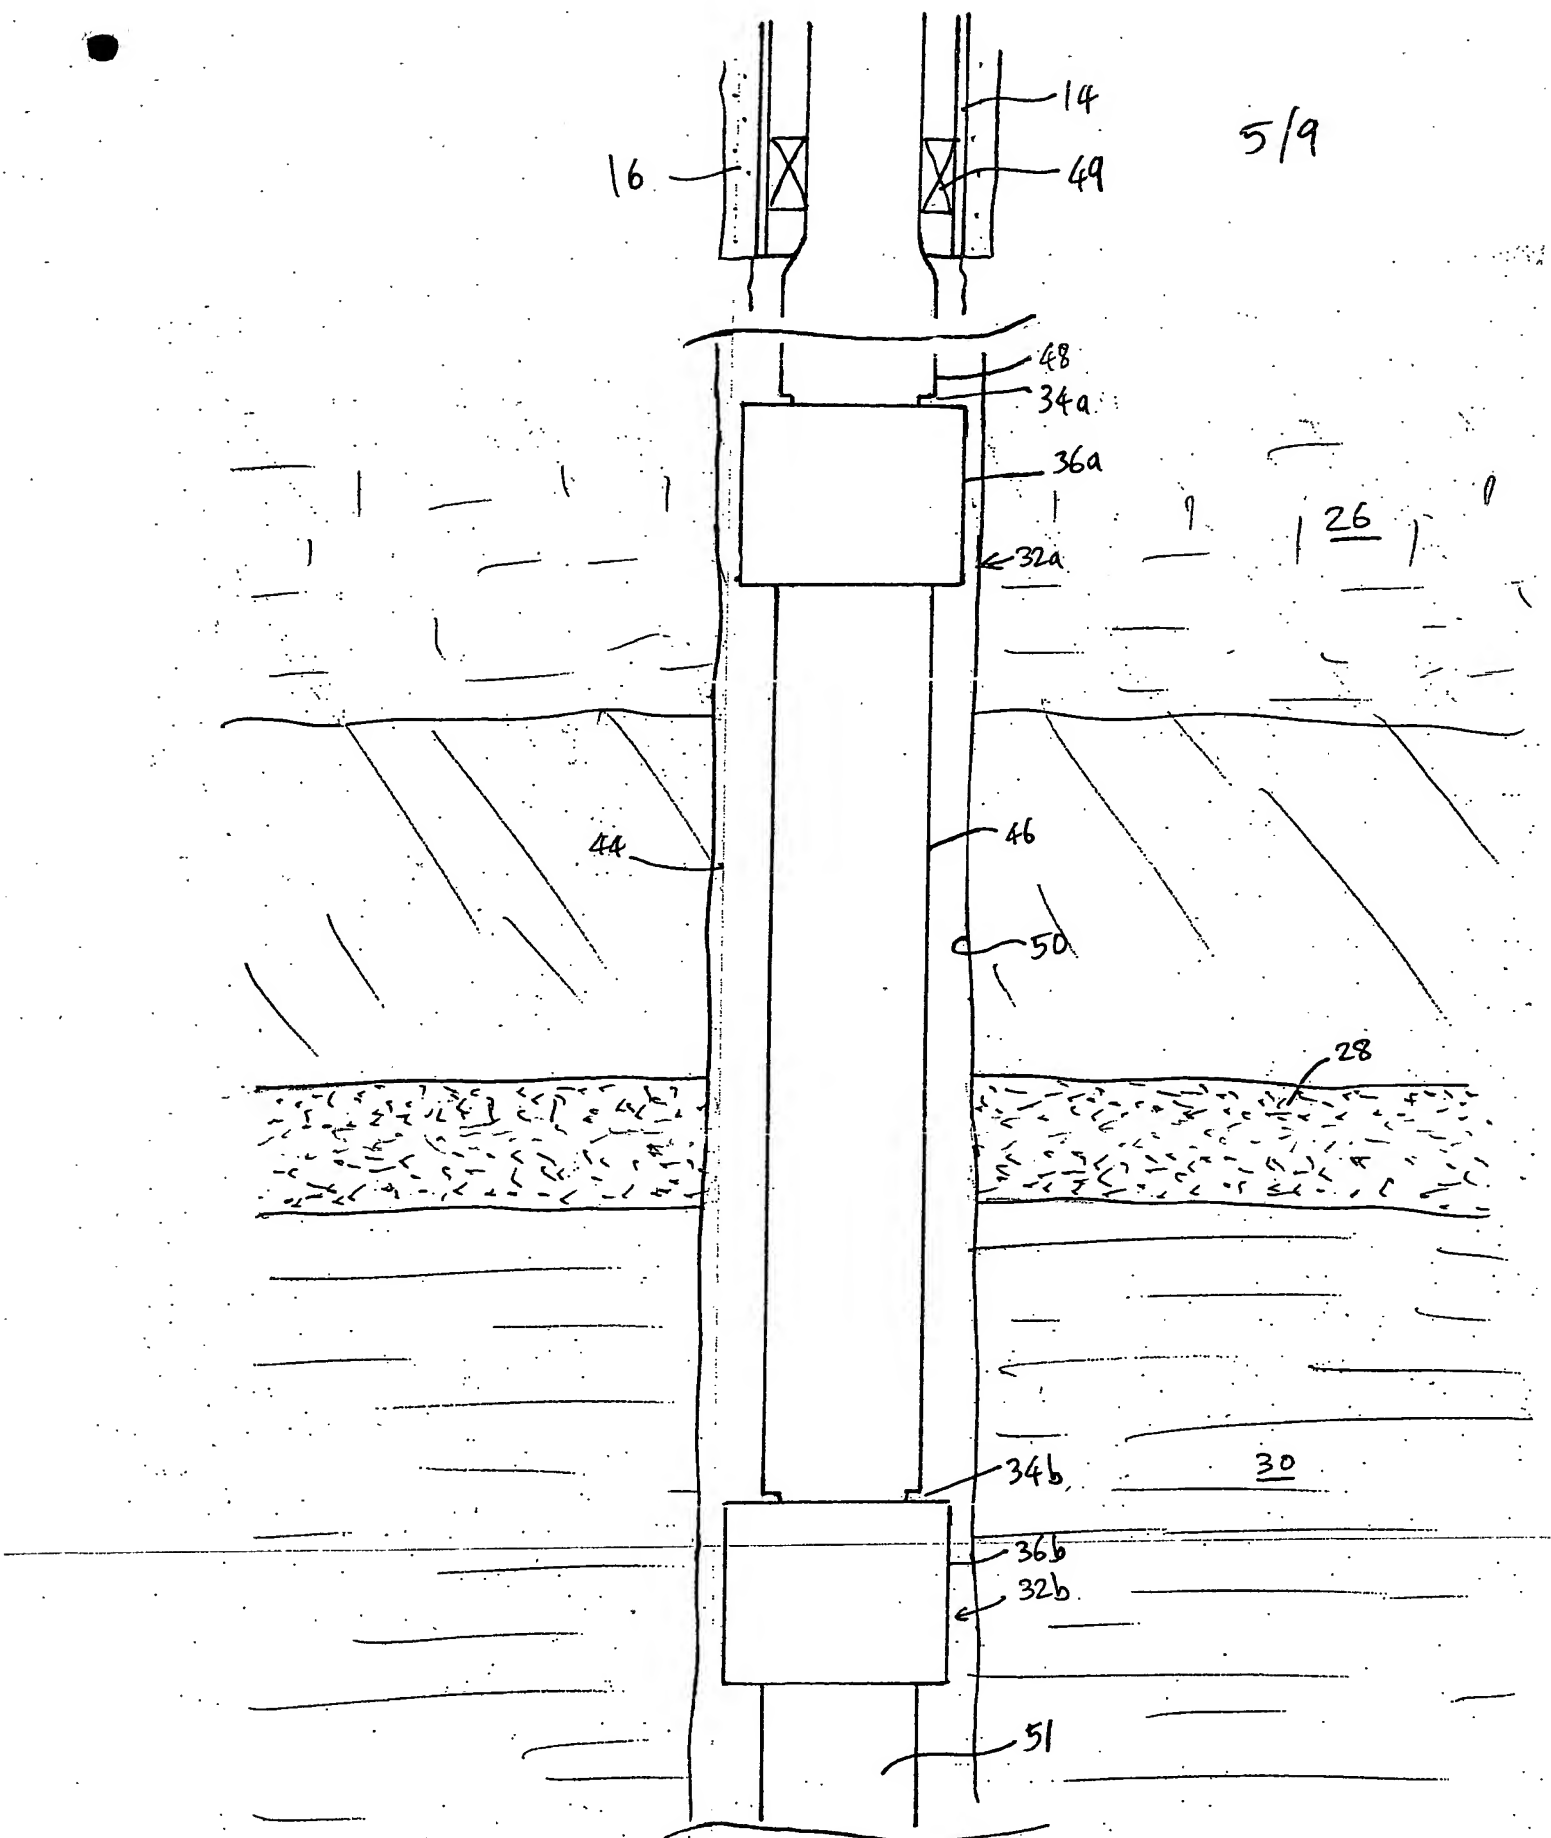


FIG 5

THIS PAGE BLANK (USPTO)

6/9


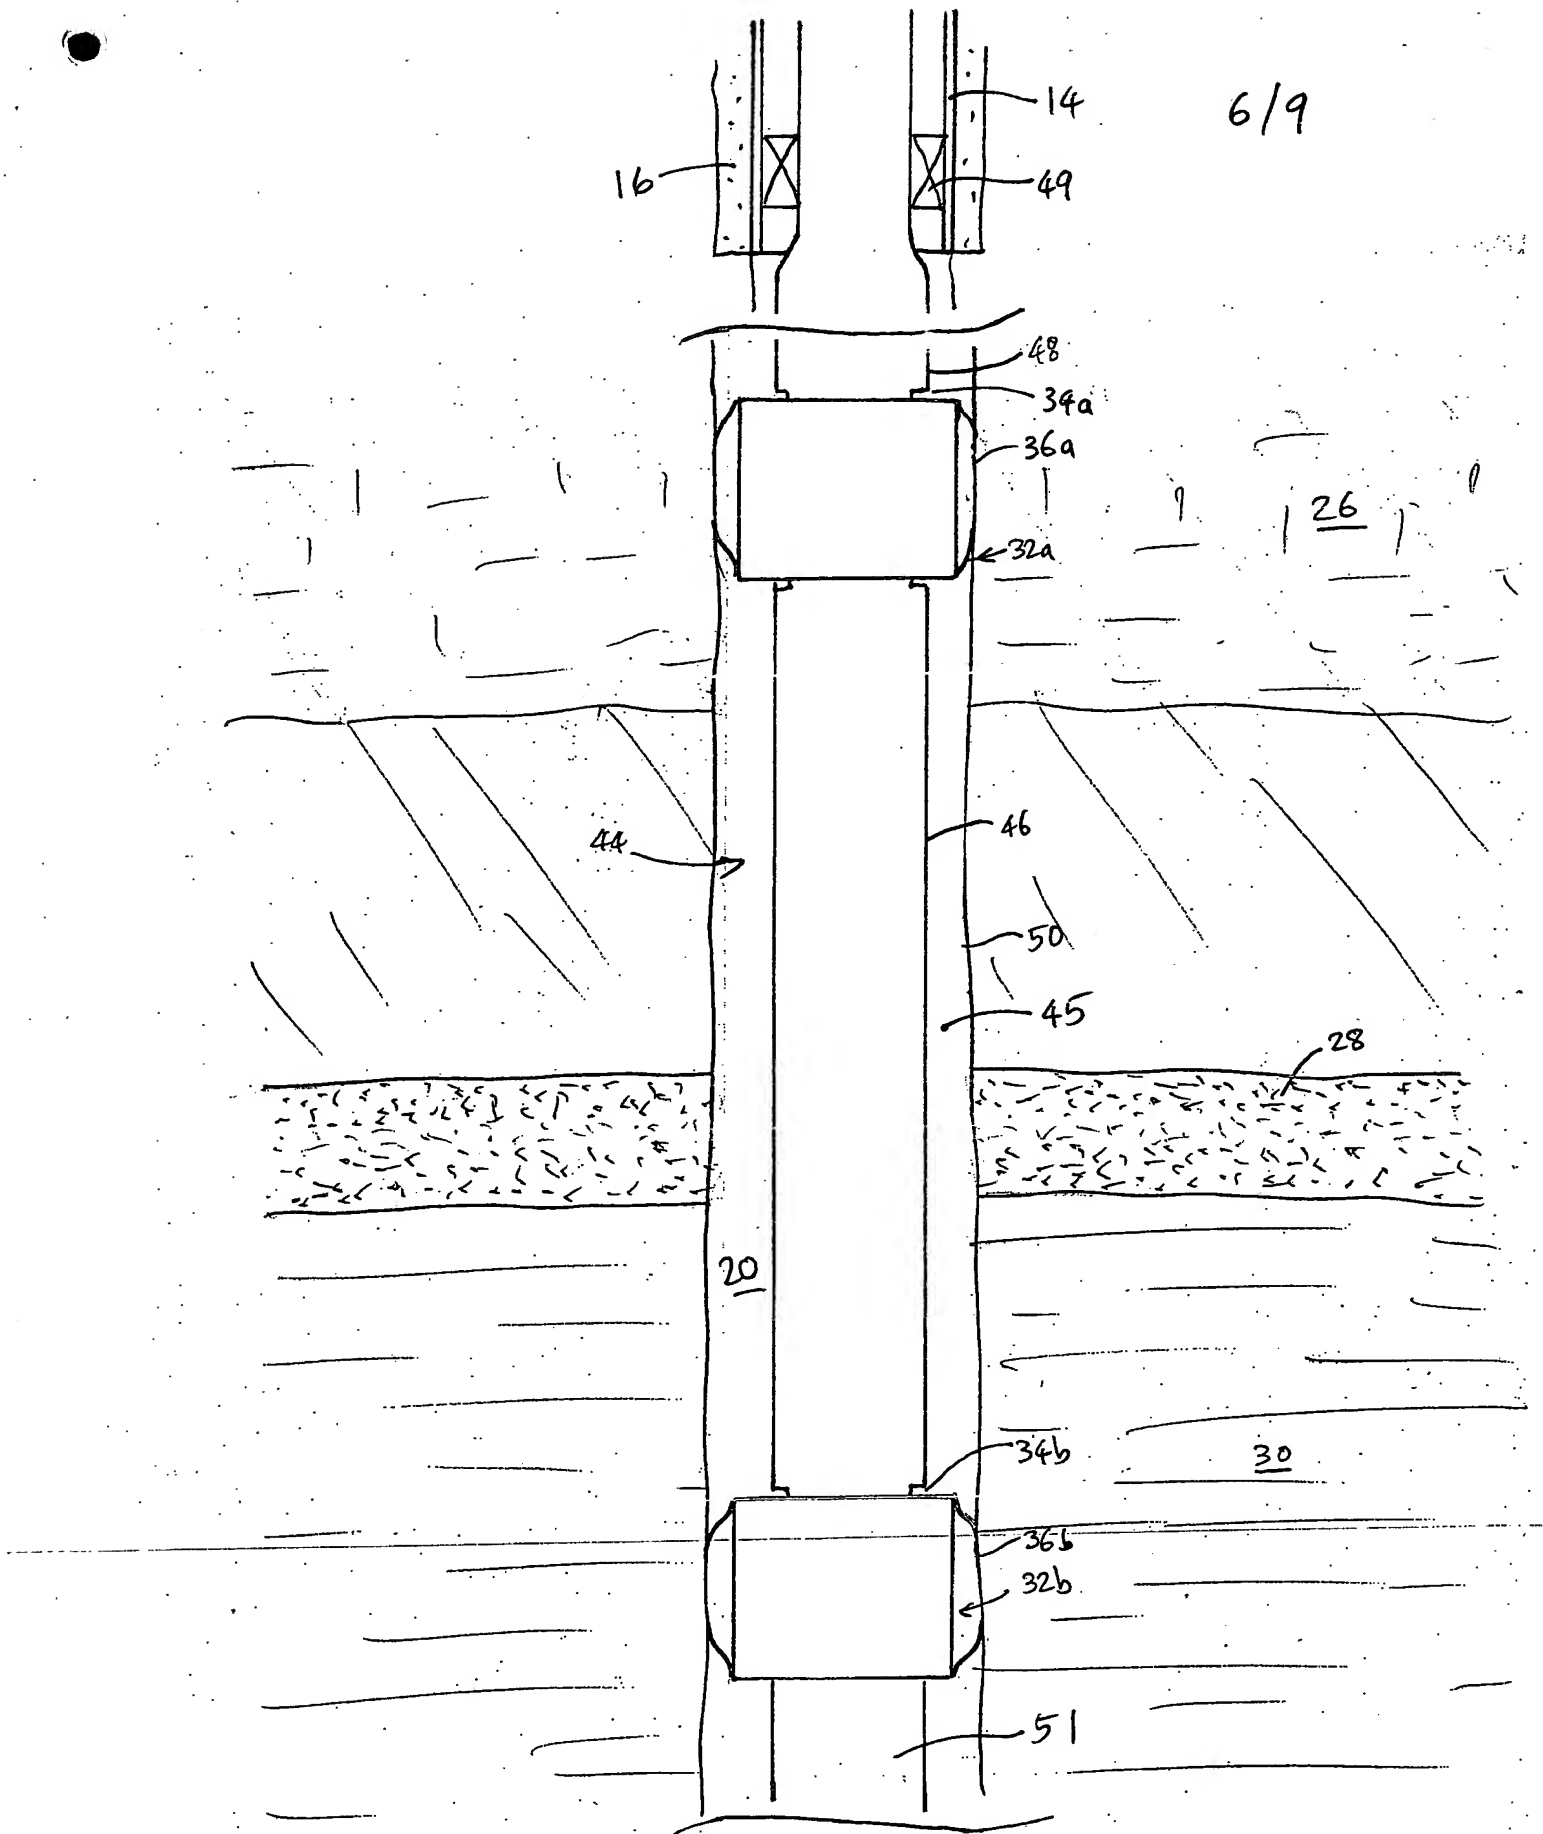


FIG 6


THIS PAGE BLANK (USPTO)

7/9

1. As Run in Hole

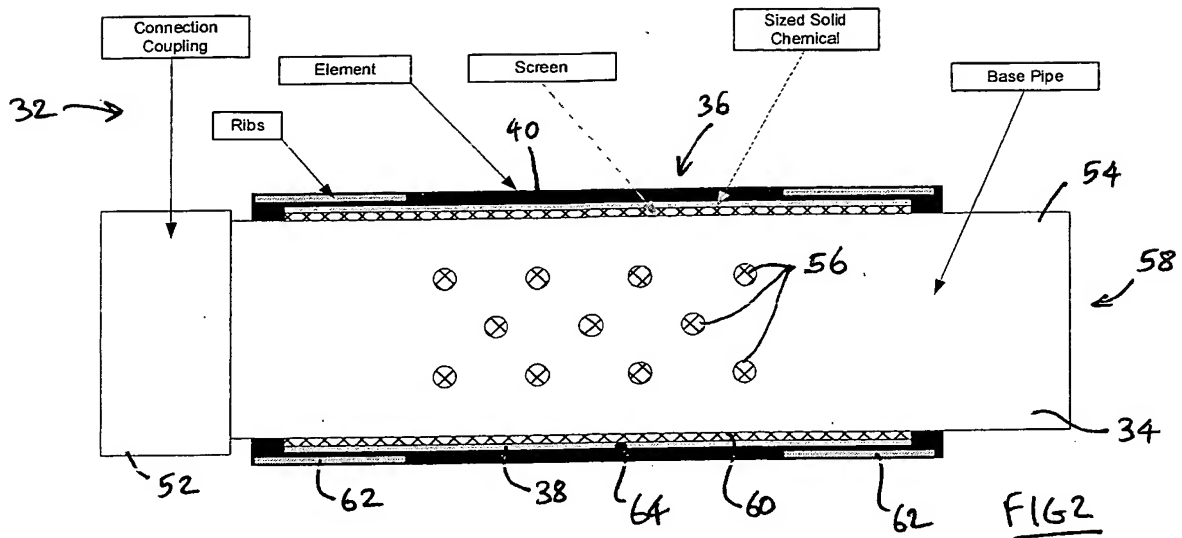


2. Expanded Downhole

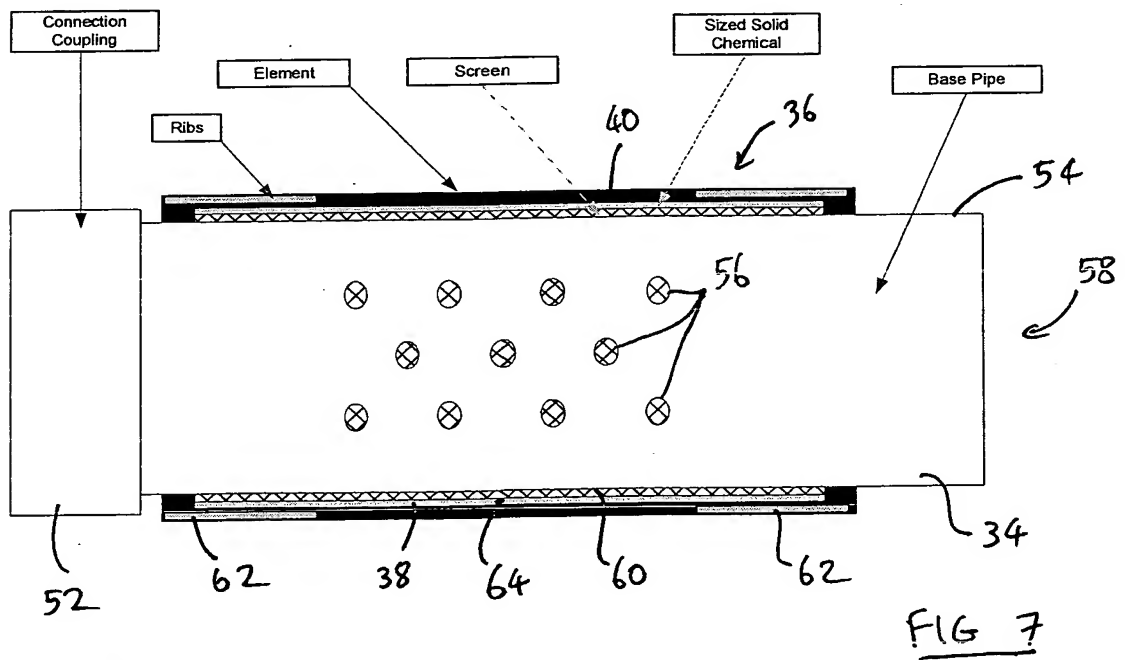


32 →

THIS PAGE BLANK (USPTO)


3. Spot Catalyst Fluid

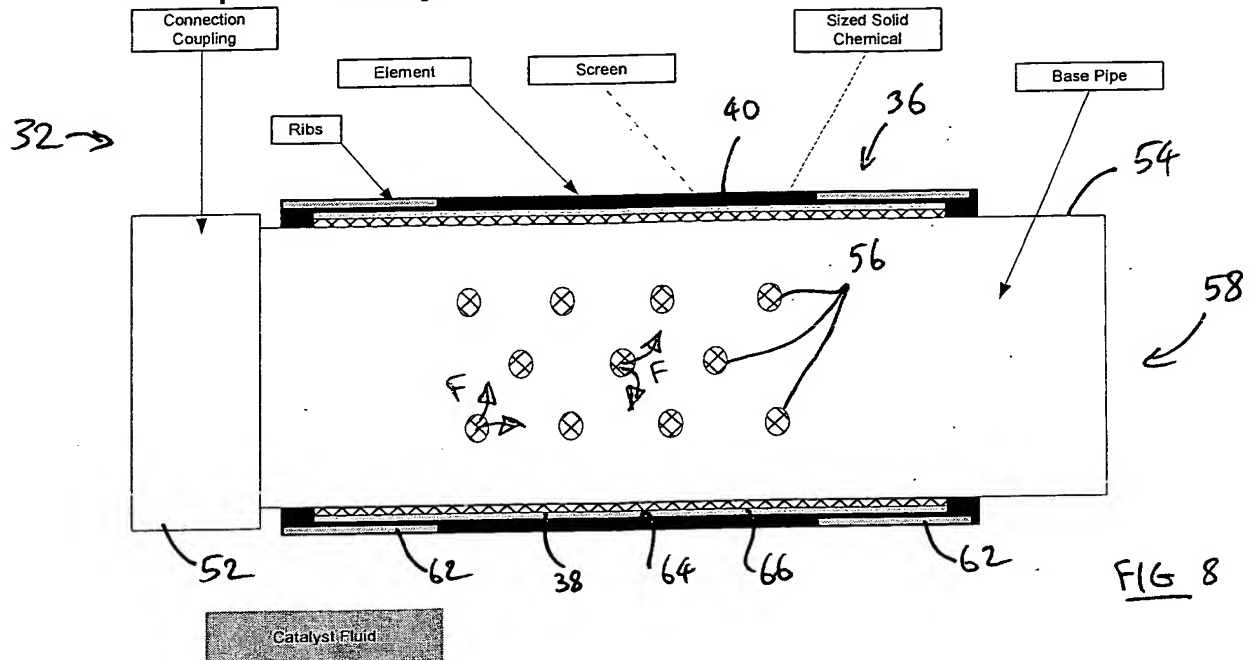

4. Inflate element hydraulically by applied surface pressure

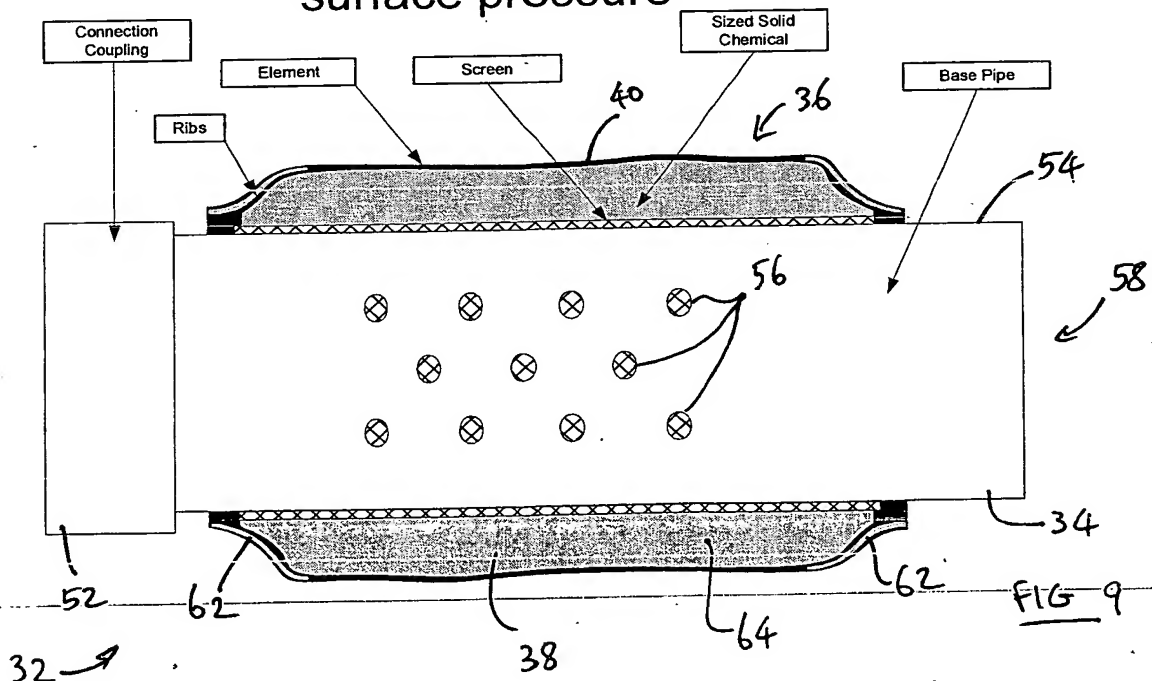

THIS PAGE BLANK (USPTO)

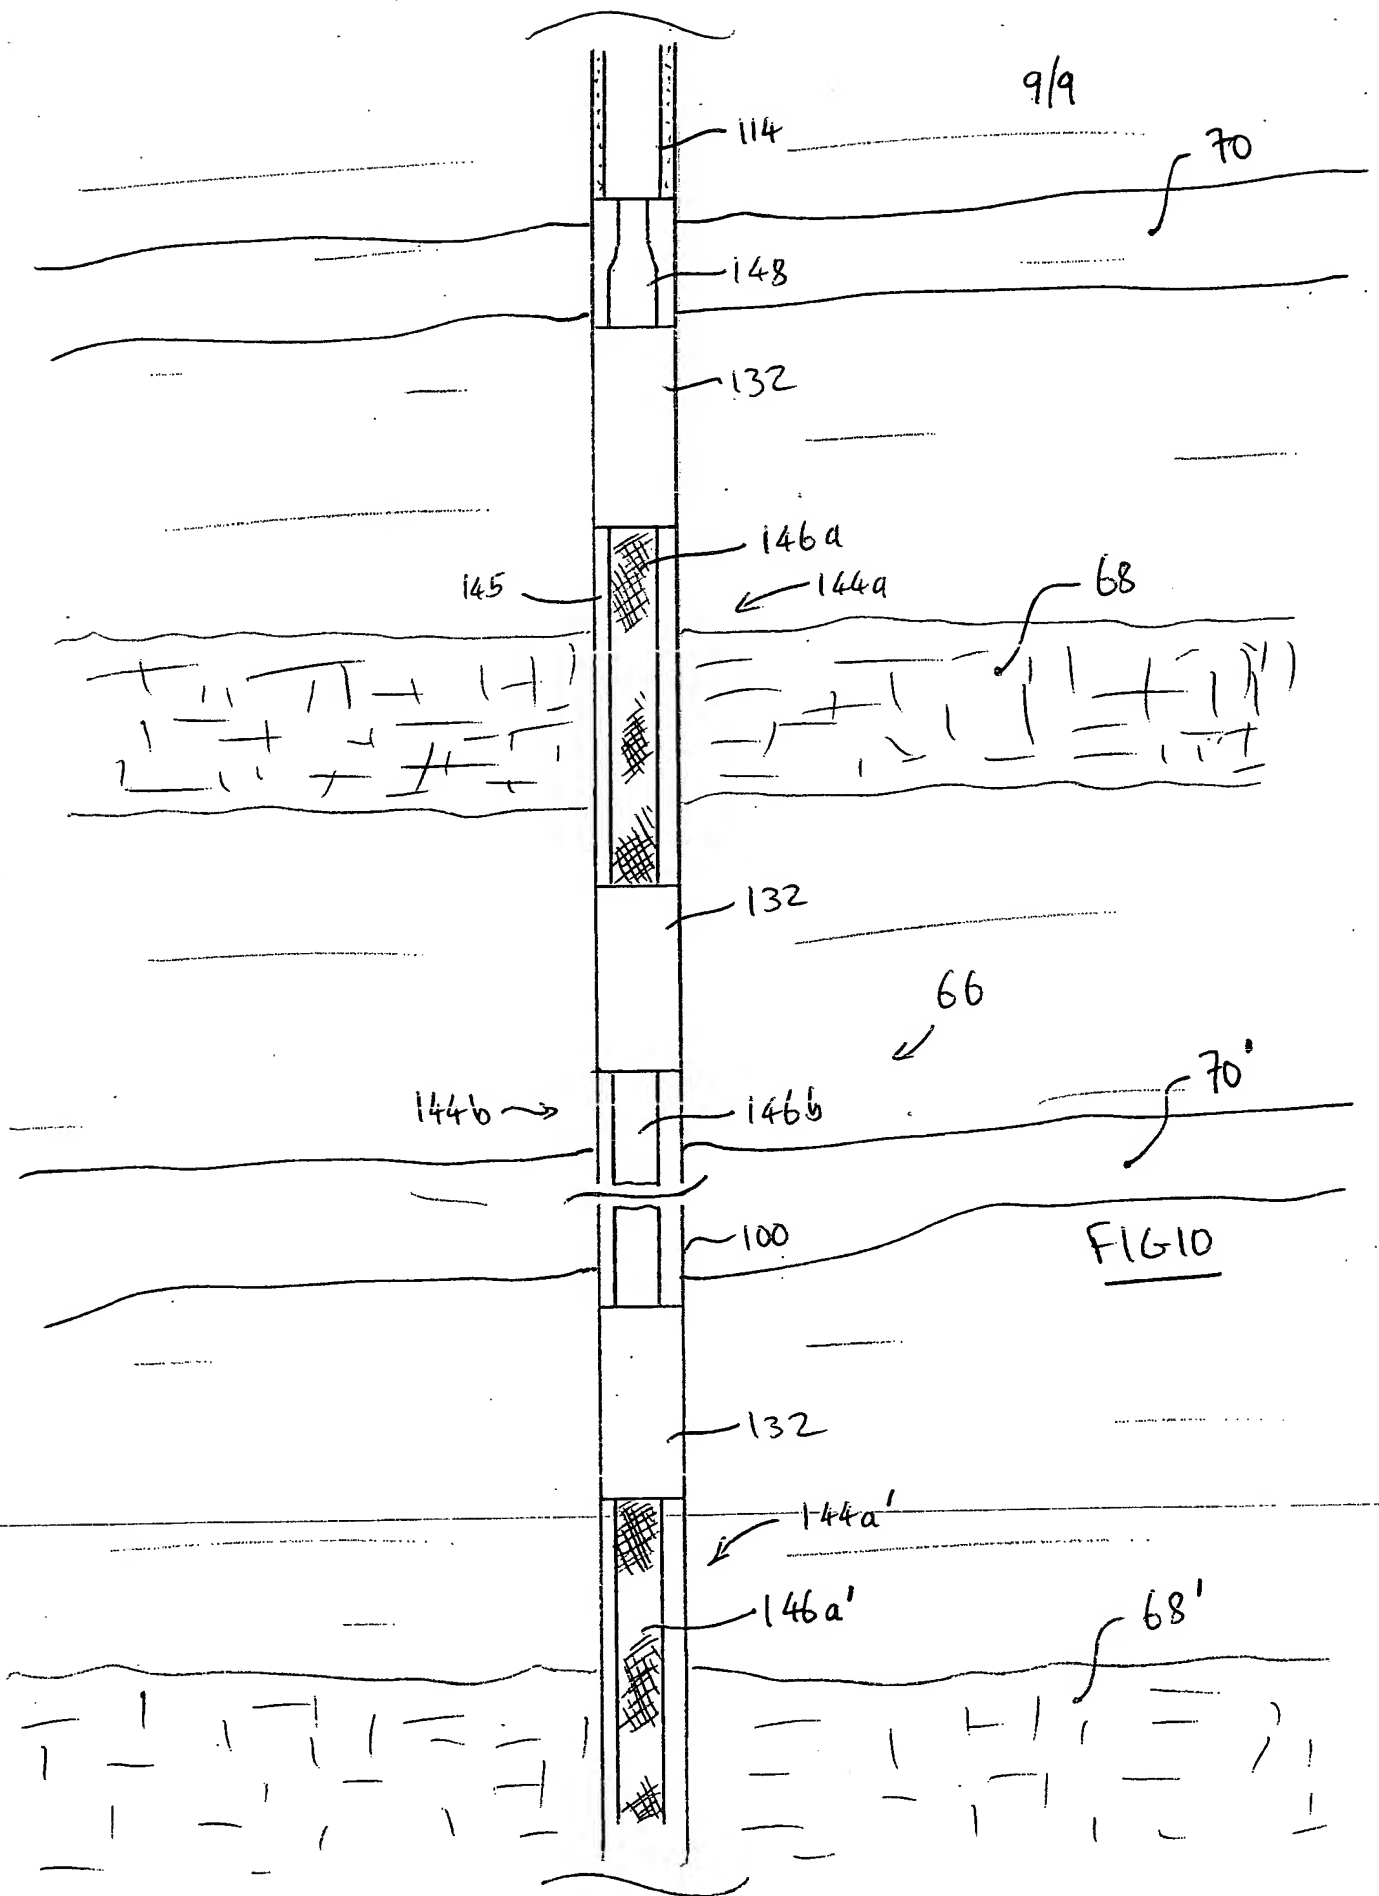

THIS PAGE BLANK (USPTO)